




Test Report TR3768-165-ETSI-300-328-BTC

Equipment Under Test:	SONA NX611 M.2 2230, 2 MHF
Requirement(s):	ETSI EN 300 328 AS/NZS 4268
Test Date(s):	04/30/2024-05/29/2024
Prepared for:	Ezurio Attn: Brian Petted W66 N220 Commerce Ct. Cedarburg, WI 53012

Report Issued by: Adam Alger, Manager EMC Laboratory	
Signature: 	Date: 02/13/2025
Report Reviewed by: Dylan Rosenfeldt, EMC Engineer	
Signature: 	Date: 02/12/2025
Report Constructed by: Adam Alger, Manager EMC Laboratory	
Signature: 	Date: 02/11/2025

This test report may not be reproduced, except in full, without approval of Ezurio

Company: Ezurio	Page 1 of 34	Name: SONA NX611 M.2 2230, 2 MHF
Report: TR3768-165-ETSI-300-328-BTC		Model: SONA NX611M
Job: C-3768		Serial: Eng Sample

CONTENTS

Contents.....	2
Ezurio Test Services in Review	3
1 Test Report Summary	4
2 Client Information	5
2.1 Equipment Under Test (EUT) Information.....	5
2.2 Product Description	5
2.3 Modifications Incorporated for Compliance	5
2.4 Deviations and Exclusions from Test Specifications	5
2.5 EUT Information	5
2.6 Ancillary Equipment	6
2.7 Antenna Information	6
2.8 Test Channels.....	6
2.9 EUT Power Setting	6
3 References	7
4 Uncertainty Summary	8
5 Test Data	9
5.1 Antenna Port Conducted Emissions	9
5.2 Radiated Emissions	25
6 Revision History	34

Ezurio Test Services in Review

The Ezurio laboratory located at W66 N220 Commerce Court Cedarburg, Wisconsin, 53012 USA is recognized through the following organizations:



A2LA – American Association for Laboratory Accreditation

Accreditation based on ISO/IEC 17025:2017 with Electrical (EMC) Scope

A2LA Certificate Number: 1255.01

Scope of accreditation includes all test methods listed herein unless otherwise noted



Federal Communications Commission (FCC) – USA

Accredited Test Firm Registration Number: 953492

Recognition of two 3 meter Semi-Anechoic Chambers



Innovation, Science and Economic Development Canada

Accredited U.S. Identification Number: US0218

Recognition of two 3 meter Semi-Anechoic Chambers

Company: Ezurio	Page 3 of 34	Name: SONA NX611 M.2 2230, 2 MHF
Report: TR3768-165-ETSI-300-328-BTC		Model: SONA NX611M
Job: C-3768		Serial: Eng Sample

1 TEST REPORT SUMMARY

During **04/30/2024-05/29/2024** the Equipment Under Test (EUT), **SONA NX611 M.2 2230, 2 MHF**, as provided by **Ezurio** was tested to the following requirements:

ETSI EN 300 328 | AS/NZS 4268 – FHSS – Bluetooth Classic

Requirements	Description	Method	Specification	Compliant
4.3.1.2	RF Output Power	5.4.2.2.1.2	≤20 dBm	Yes
4.3.1.4	Accumulated Transmit Time, Frequency Occupation, and Hopping Sequence	5.4.4	FHSS	Yes
4.3.1.5	Hopping Frequency Separation	5.4.5	>OCBW	Yes
4.3.1.8	Occupied Channel Bandwidth	5.4.7	2400-2483.5 MHz	Yes
4.3.1.9	Transmitter Unwanted Emissions in the Out-Of-Band Domain	5.4.8	2400 MHz - 2BW – 2483.5 MHz +2BW	Yes
4.3.1.10	Transmitter Unwanted Emissions in the Spurious Domain	5.4.9	30-12750 MHz	Yes
4.3.1.11	Receiver Spurious Emissions	5.4.10	30-12750 MHz	Yes
4.3.1.12	Receiver Blocking (Category 2)	5.4.11	PER ≤ 10%	Yes

Notice:

The results relate only to the item tested as configured and described in this report. Any additional configurations, modes of operation, or modifications made to the equipment under test after the specified test date(s) are at the decision of the client and may not apply to the data seen in this test report.

The decision rule for Pass / Fail assessment to the specification or standard listed in this test report has been agreed upon by the client and laboratory to be as follows:

Measurement Type	Rule
Emissions – Amplitude	0.5 dB below specified limit
Emissions – Frequency	1% less than the specification
Immunity	Tested at specified level

Company: Ezurio	Page 4 of 34	Name: SONA NX611 M.2 2230, 2 MHF
Report: TR3768-165-ETSI-300-328-BTC		Model:SONA NX611M
Job: C-3768		Serial: Eng Sample

2 CLIENT INFORMATION

Company Name	Ezurio
Contact Person	Brian Petted
Address	W66 N220 Commerce Ct. Cedarburg, WI 53012

2.1 Equipment Under Test (EUT) Information

The following information has been supplied by the client

Product Name	SONA NX611 M.2 2230, 2 MHF
Part Number	453-00165
Serial Number	Eng Sample
FCC ID	SQG-SONANX611M
IC ID	3147A-SONANX611M

2.2 Product Description

The NX611 is based upon NXP IW611 Wi-Fi 6 chipset. Feature-set includes 802.11 a/b/g/n/ac/ax Wi-Fi 6 and Dual-Mode Bluetooth v5.3 (BDR + EDR + BLE).

2.3 Modifications Incorporated for Compliance

None noted at time of test

2.4 Deviations and Exclusions from Test Specifications

None noted at time of test

2.5 EUT Information

Power Supply – INPUT:100-240VAC 50/60 Hz 0.3A

OUTPUT: 5VDC 2A

Firmware - sduart_nw61x_v1.bin.se

Sduart_nw61x_v1_mfg.bin.se

Company: Ezurio	Page 5 of 34	Name: SONA NX611 M.2 2230, 2 MHF
Report: TR3768-165-ETSI-300-328-BTC		Model:SONA NX611M
Job: C-3768		Serial: Eng Sample

2.6 Ancillary Equipment

Equipment used for EUT programming (not part of the EUT)

Development Kit, SU60-SOMC 6.0

P/N: 463-00138-K1 Rev 1

Power Supply: INPUT: 100-240 VAC 50/60Hz 0.7A

OUTPUT: 12VDC 2A

HP Elitebook 840G1

Labtool Version: 1.0.0.45.6

2.7 Antenna Information

Manufacturer	Model	Part Number	Dimension	Type	Peak Gain (dBi)	
					2400-2500 MHz	4900-5925 MHz
Laird Connectivity	FlexMIMO 6E	EFD2471A3S-10MH4L	39.5mm X 39.5mm X 4.7mm	PIFA	2.2	3.8
Laird Connectivity	FlexPIFA 6E	EFB2471A3S-10MH4L	16mm X 36mm X 2.5mm	PIFA	2.2	3.9
Laird Connectivity	Mini NanoBlade Flex 6E	EMF2471A3S-10MH4L	36mm X 12mm X 0.3mm	PCB Dipole	2.4	4.4
Joymax Electronics	N/A	TWX-100BRS3B	137mm X 13mm	Dipole	2.0	4.0
Laird Connectivity	FlexPIFA	EFB2455A3S-16MHF1	38.5mm X 12.7 mm X 2.5mm	PIFA	2.5	3.0

2.8 Test Channels

Channel	Frequency (MHz)	Data Rates
0	2402	DH5, 2-DH5, 3-DH5
39	2441	
78	2480	
Hopping	-	

2.9 EUT Power Setting

Data Rate	Power Setting
DH5	6
2-DH5	6
3-DH5	6

3 REFERENCES

Publication	Edition	Date	AMD 1
ETSI EN 300 328	2.2.2	2019	-
AS/NZS 4268	-	2017	2021

4 UNCERTAINTY SUMMARY

Using the guidance of the following publications the calculated measurement uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level, using a coverage factor of $k = 2$.

References

CISPR 16-4-1

CISPR 16-4-2

CISPR 32

ANSI C63.23

A2LA P103

A2LA P103c

ETSI TR 100-028

Measurement Type	Configuration	Uncertainty \pm
Radiated Emissions	Biconical Antenna	5.0 dB
Radiated Emissions	Log Periodic Antenna	5.3 dB
Radiated Emissions	Horn Antenna	4.7 dB
AC Line Conducted Emissions	Artificial Mains Network	3.4 dB
Telecom Conducted Emissions	Asymmetric Artificial Network	4.9 dB
Disturbance Power Emissions	Absorbing Clamp	4.1 dB
Radiated Immunity	3 Volts/meter	2.2 dB
Conducted Immunity	CDN/EM/BCI	2.4/3.5/3.4 dB
EFT Burst/Surge	Peak pulse voltage	164 volts
ESD Immunity	15 kV level	1377 Volts


Parameter	ETSI U.C. \pm	U.C. \pm
Radio Frequency, from F0	1×10^{-7}	0.55×10^{-7}
Occupied Channel Bandwidth	5 %	2 %
RF conducted Power (Power Meter)	1.5 dB	1.2 dB
RF conducted emissions (Spectrum Analyzer)	3.0 dB	1.7 dB
All emissions, radiated	6.0 dB	5.3 dB
Temperature	1° C	0.65° C
Humidity	5 %	2.9 %
Supply voltages	3 %	1 %

5 TEST DATA


5.1 Antenna Port Conducted Emissions

Description of Measurement	<p>The direct measurement of emissions at the antenna port of the EUT is achieved by use of a RF connection to a spectrum analyzer or power meter.</p> <p>The cable and attenuator factors are loaded into the analyzer or power meter allowing for direct measurement readings without the need for further corrections.</p>
Example Calculations	<p>Measurement (dBm) + Cable factor (dB) + External Attenuator (dB) = Corrected Reading (dBm)</p> <p>Margin (dB) = Limit (dBm) – Corrected Reading (dBm)</p>


Block Diagram

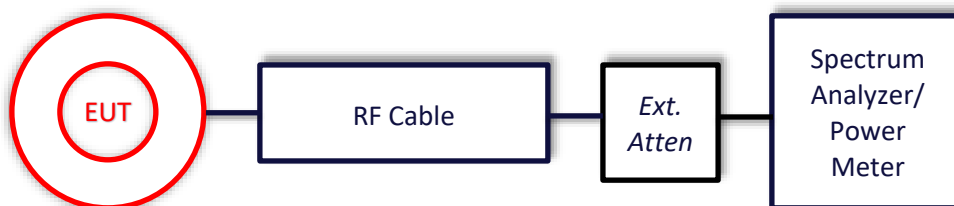


Setup Photos

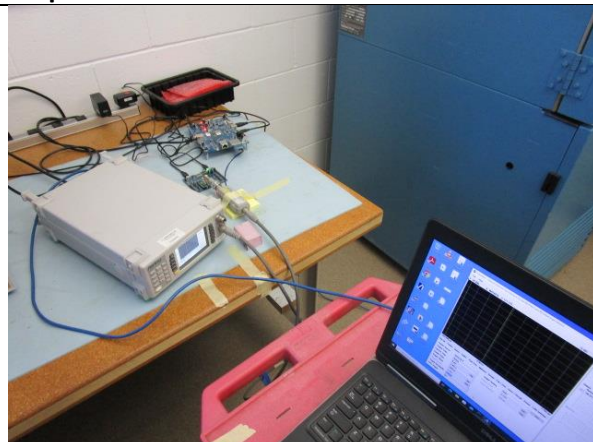


Output Power – Normal Temperature

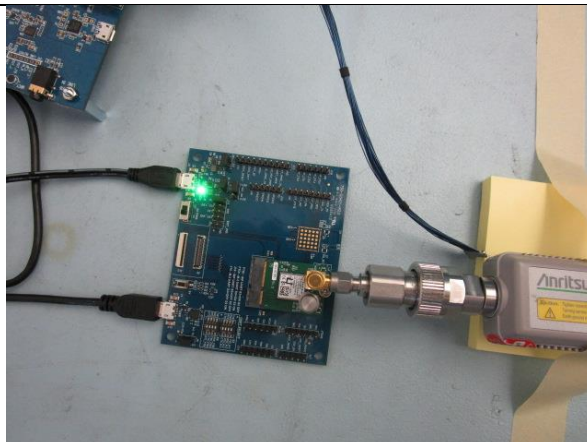

Output Power – Normal Temperature

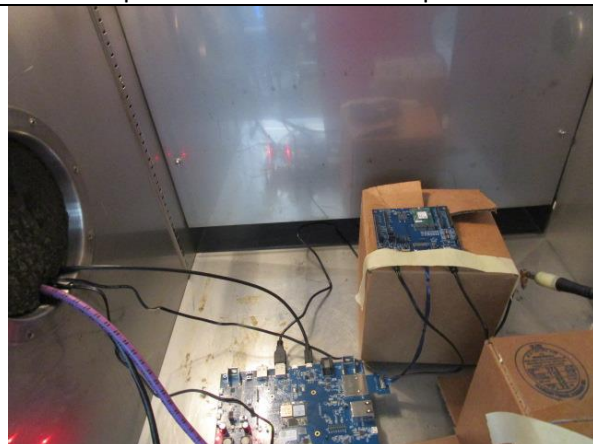

Output Power – Extreme Temperature

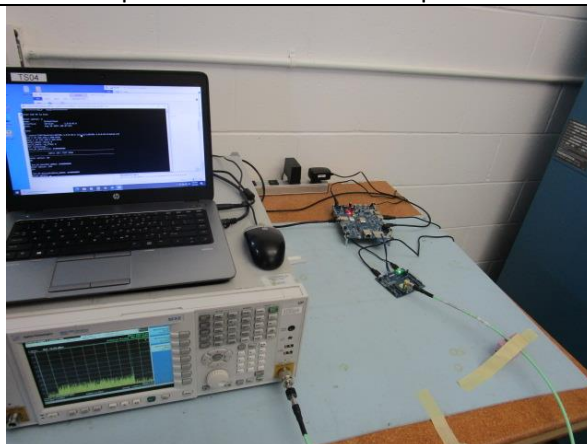

Spectrum Analyzer Setup

Instrumentation

Asset #	Description	Manufacturer	Model #	Serial #	Date	Due Date	Status
EE 960090	Meter - RF Power	Anritsu	ML2495A	1335006	4/13/2024	4/13/2025	Active Calibration
EE 960091	Sensor - RF Power	Anritsu	MA2491A	1249277	4/13/2024	4/13/2025	Active Calibration
AA 960144	Cable	Gore	EKD01D010720	5800373	1/28/2025	1/28/2026	Active Verification
EE 960085	Analyzer - EMI Receiver	Agilent	N9038A	MY51210148	4/27/2024	4/27/2025	Active Calibration
AA 960173	Cable	A.H. Systems, Inc.	SAC-26G-1	388	6/13/2023	6/12/2024	Active Verification

5.1.1 RF Output Power

Operator	Dylan Rosenfeldt	QA	Adam Hauke
Temperature	21.8°C	R.H. %	48.80%
Test Date	05/13/2024	Location	Conducted RF Bench
Requirement	4.3.1.2	Method	5.4.2.2.1.2

Limits: The RF output power for FHSS equipment shall be equal to or less than 20 dBm.

Test Parameters

Frequency	2400-2483.5 MHz	Setup	Antenna Port
Operating Temperature	-40.0°C to +85°C	Sample Speed	1 MS/s

Normal Operating Temperature

Rate	Channel	Avg Output Power (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
DH5	Hopping	6.6	9.1	20.0	10.9
2-DH5	Hopping	4.8	7.3	20.0	12.7
3-DH5	Hopping	4.8	7.3	20.0	12.7

+85°C Temperature

Rate	Channel	Avg Output Power (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
DH5	Hopping	6.2	8.7	20.0	11.3
2-DH5	Hopping	4.7	7.2	20.0	12.8
3-DH5	Hopping	4.7	7.2	20.0	12.8

-40°C Temperature

Rate	Channel	Avg Output Power (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
DH5	Hopping	6.8	9.3	20.0	10.7
2-DH5	Hopping	4.7	7.2	20.0	12.8
3-DH5	Hopping	4.7	7.2	20.0	12.8

5.1.2 Accumulated Transmit Time, Frequency Occupation, Sequence, and Separation

Operator	Dylan Rosenfeldt	QA	Adam Hauke
Temperature	21.6°C	R.H. %	45.8%
Test Date	05/7/2024	Location	Conducted RF Bench
Requirement	4.3.1.4	Method	5.4.4

Limits: The Accumulated Transmit Time on any hopping frequency shall not be greater than 15 ms within any observation period of 15 ms multiplied by the number of hopping frequencies (N) that have to be used.


Test Parameters

Frequency	2400-2483.5 MHz	Detector(s)	RMS
RBW	430 kHz	VBW	1 MHz

Table

Channel	Rate	Frequency (MHz)	Transmit Time (ms)	Limit (ms)	Margin (ms)
0	DH5	2402.0	8.8	15.0	6.2

Plot

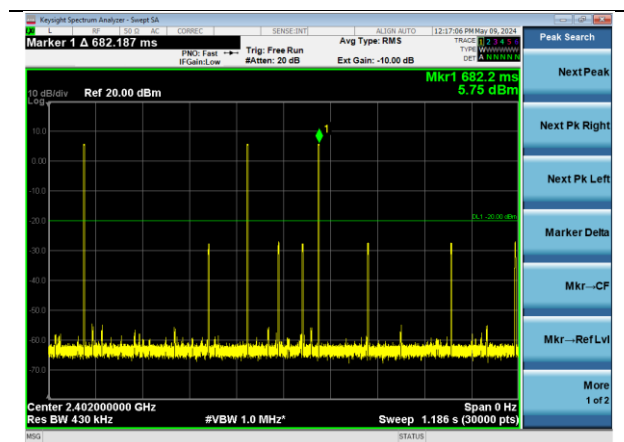


Limits: Each hopping frequency of the Hopping Sequence shall be occupied at least once within a period not exceeding four times the product of the dwell time and the number of hopping frequencies in use.

Test Parameters

Frequency	2400-2483.5 MHz	Detector(s)	RMS
RBW	430 kHz	VBW	1 MHz
Requirement	Each hopping frequency shall be occupied at least once in 1.186s		

Plot

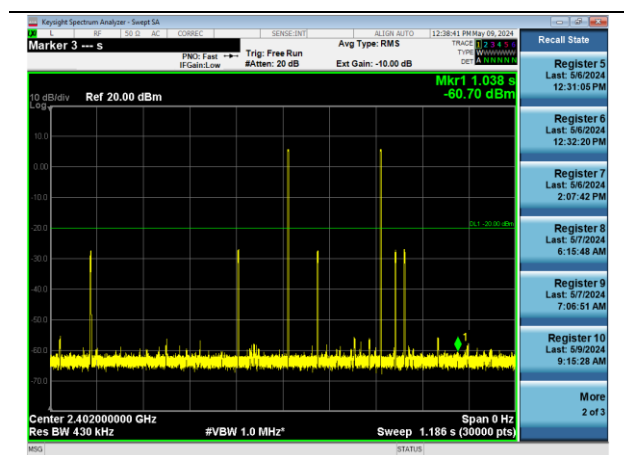


Company: Ezurio	Page 13 of 34	Name: SONA NX611 M.2 2230, 2 MHF
Report: TR3768-165-ETSI-300-328-BTC		Model:SONA NX611M
Job: C-3768		Serial: Eng Sample

Limits: The Hopping Sequence(s) shall contain at least N hopping frequencies where N is either 5 or the result of 15 MHz divided by the minimum Hopping Frequency Separation in MHz, whichever is the greater.

Test Parameters

Frequency	2400-2483.5 MHz	Detector(s)	Peak
RBW	430 kHz	VBW	1 MHz

Plot

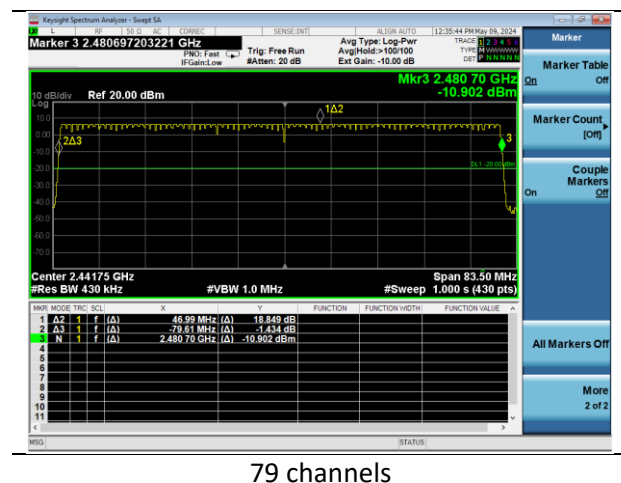


Limits: For non-adaptive FHSS equipment, the Hopping Frequency Separation shall be equal to or greater than the Occupied Channel Bandwidth, with a minimum separation of 100 kHz.

Table

Channel	Rate	Frequency (MHz)	Frequency Separation (kHz)	Limit (kHz)	Margin (kHz)
0	DH5	2402.5	1011.5	100.0	911.5

Plot

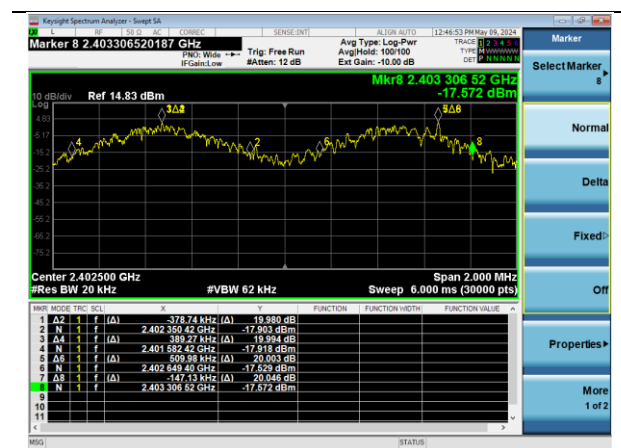

5.1.3 Occupied Channel Bandwidth

Operator	Dylan Rosenfeldt	QA	Adam Hauke
Temperature	21.6°C	R.H. %	47.2%
Test Date	05/03/2024	Location	Conducted RF Bench
Requirement	4.3.1.8	Method	5.4.7

Limits: The Occupied Channel Bandwidth shall be within the band 2400 MHz – 2483.5 MHz

Test Parameters

Frequency	2400-2483.5 MHz	Detector(s)	RMS using 99% BW function
RBW	20 kHz	VBW	62 kHz

Table

Channel	Rate	Occupied Channel Bandwidth (kHz)
0	DH5	883
	2-DH5	1195
	3-DH5	1204
78	DH5	881
	2-DH5	1191
	3-DH5	1203

Plots



5.1.4 Transmitter unwanted emissions in the out of band domain

Operator	Dylan Rosenfeldt	QA	Adam Hauke
Temperature	21.6°C	R.H. %	47.20%
Test Date	5/3/2024	Location	RF Conducted Bench
Requirement	4.3.1.9	Method	5.4.8

Limits:

Frequency (MHz)	Limit
2400 MHz - 2BW – 2400 MHz - BW	-20 dBm/ MHz e.i.r.p.
2400 MHz - BW – 2400 MHz	-10 dBm/ MHz e.i.r.p.
2400 MHz + BW – 2400 MHz	-10 dBm/ MHz e.i.r.p.
2400 MHz + 2BW – 2400 MHz + BW	-20 dBm/ MHz e.i.r.p.


Test Parameters

Frequency	2395-2488.5 MHz	Setup	Antenna Port
RBW	1 MHz	VBW	3 MHz
Measurement Mode	Time Domain Power		
Sample Calculation	EIRP = Measured Power + Antenna Gain		


Measurements

Mode	Frequency (MHz)	TDP Measurement (dBm)	EIRP (dBm)	Limit (dBm) EIRP	Margin (dB)
1DH5	2399.5	-56.0	-53.5	-10.0	43.5
2DH5	2399.5	-46.3	-43.8	-10.0	33.8
3DH5	2399.5	-44.8	-42.3	-10.0	32.3
1DH5	2484.0	-62.5	-60.0	-10.0	50.0
2DH5	2484.0	-60.4	-57.9	-10.0	47.9
3DH5	2484.0	-57.9	-55.4	-10.0	45.4


Plots

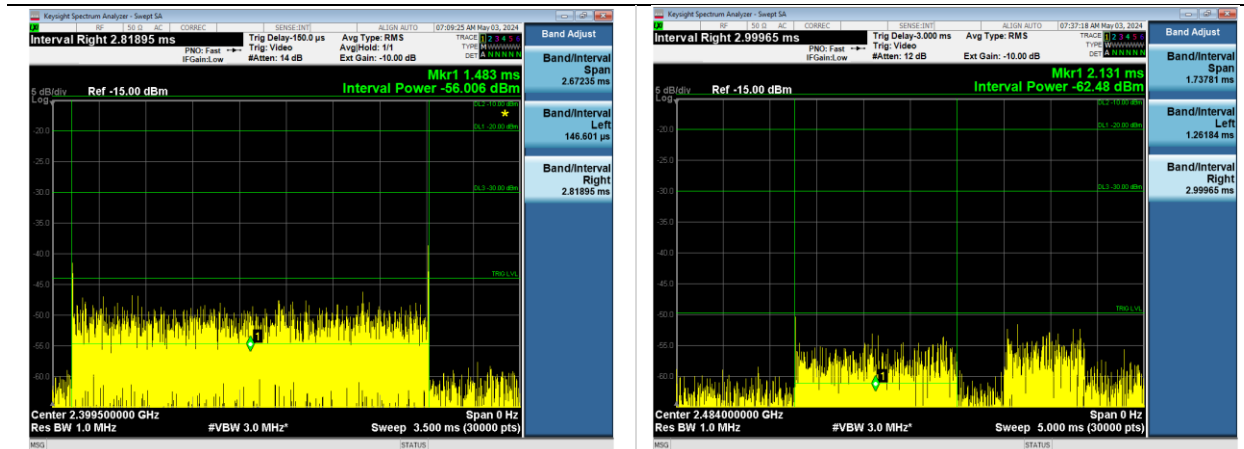

DH5

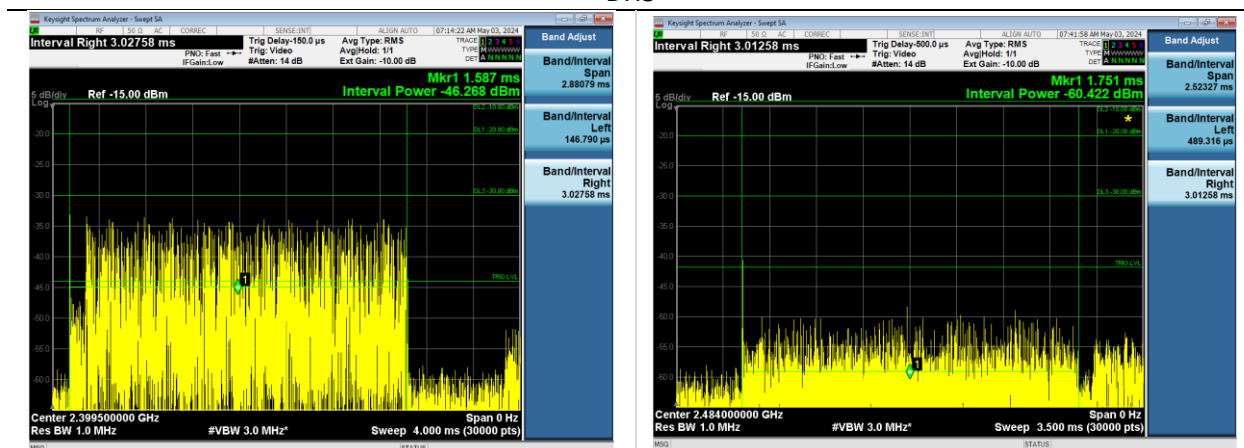

2-DH5

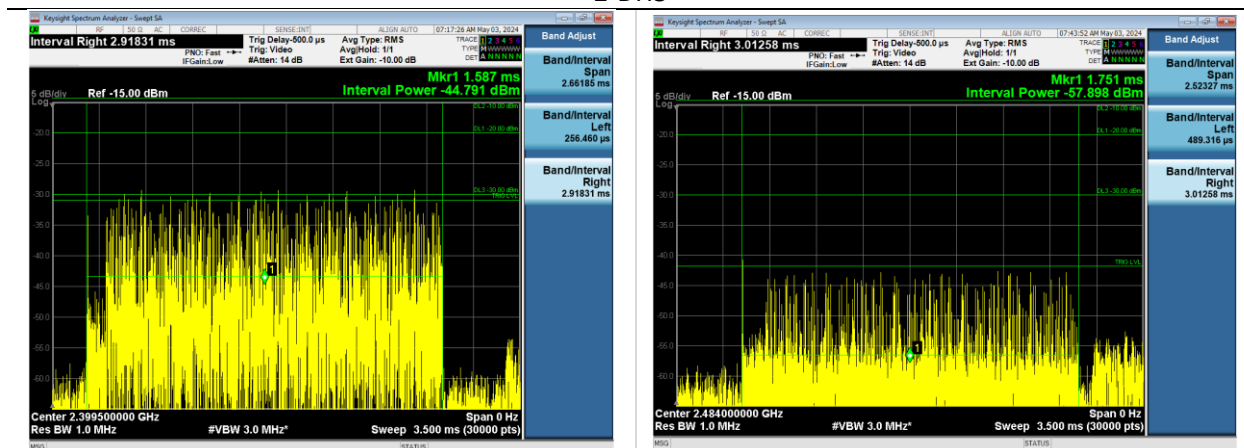

3-DH5

Company: Ezurio		Name: SONA NX611 M.2 2230, 2 MHF
Report: TR3768-165-ETSI-300-328-BTC	Page 18 of 34	Model:SONA NX611M
Job: C-3768		Serial: Eng Sample

5.1.5 Transmitter unwanted emissions in the spurious domain

Operator	Dylan Rosenfeldt	QA	Anthony Smith
Temperature	21.6°C	R.H. %	45.80%
Test Date	5/7/2024	Location	RF conducted bench
Requirement	4.3.1.10	Method	5.4.9

Limits:

Frequency (MHz)	Maximum Power	Bandwidth
30-47	-36 dBm	100 kHz
47-74	-54 dBm	100 kHz
74-87.5	-36 dBm	100 kHz
87.5-118	-54 dBm	100 kHz
118-174	-36 dBm	100 kHz
174-230	-54 dBm	100 kHz
230-470	-36 dBm	100 kHz
470-694	-54 dBm	100 kHz
694-1000	-36 dBm	100 kHz
1000-12750	-30 dBm	1 MHz


Test Parameters

Frequency	30-12750 MHz	Setup	Antenna Port
RBW	<1000 MHz – 100 kHz >1000 MHz – 1 MHz	VBW	<1000 MHz – 300 kHz >1000 MHz – 3 MHz
Measurement Mode	Time Domain Power		

Measurements

Channel	Rate	Frequency (MHz)	Measurement (dBm)	Limit (dBm)	Margin (dB)
0	DH5	2396.4	-64.2	-30.0	34.2

Plots

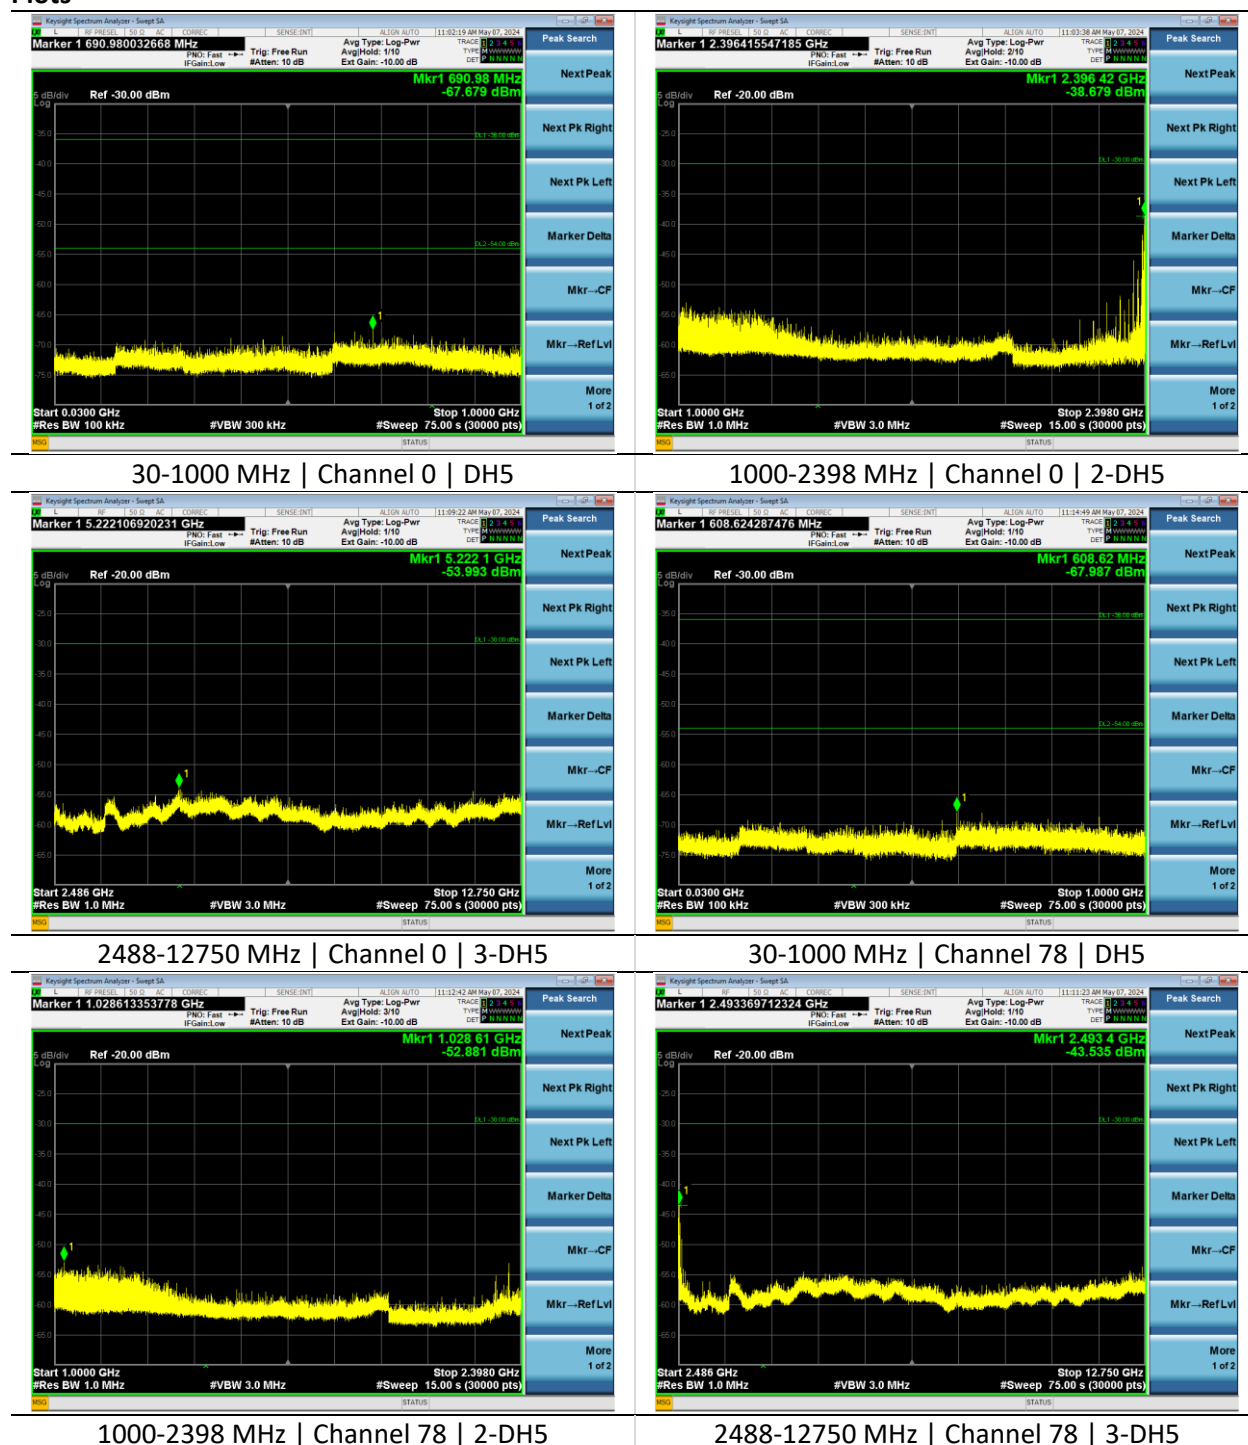

5.1.6 Receiver Spurious Domain

Operator	Dylan Rosenfeldt	QA	Anthony Smith
Temperature	21.6°C	R.H. %	45.80%
Test Date	5/7/2024	Location	RF conducted bench
Requirement	4.3.1.11	Method	5.4.10


Limits:

Frequency (MHz)	Maximum Power	Bandwidth
30-1000	-57 dBm	100 kHz
1000-12750	-47 dBm	1 MHz

Test Parameters


Frequency	30-12750 MHz	Setup	Antenna Port
RBW	<1000 MHz – 100 kHz >1000 MHz – 1 MHz	VBW	<1000 MHz – 300 kHz >1000 MHz – 3 MHz
Note	No emissions within 6 dB of limit		

Plots

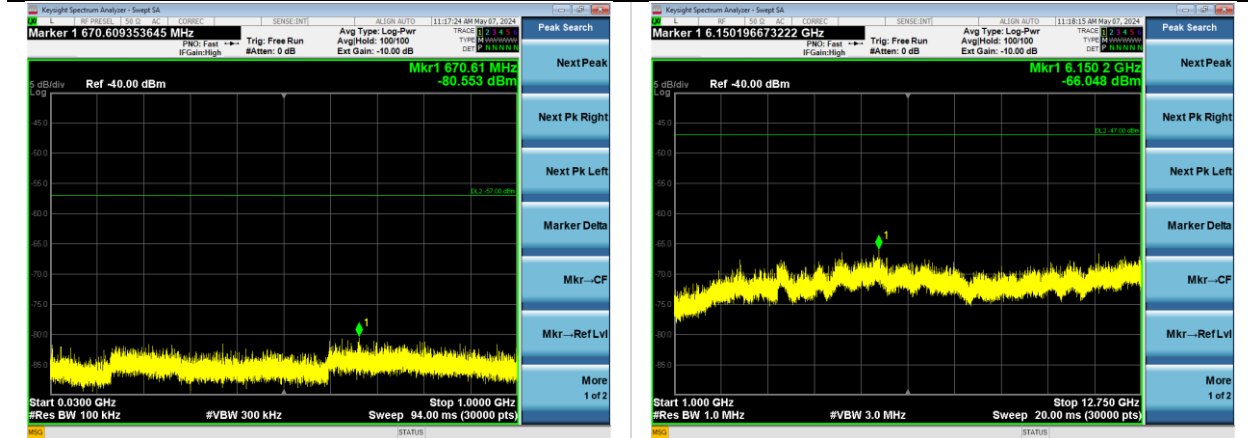

30-1000 MHz | Channel 0 | DH5

1000-12750 MHz | Channel 0 | DH5

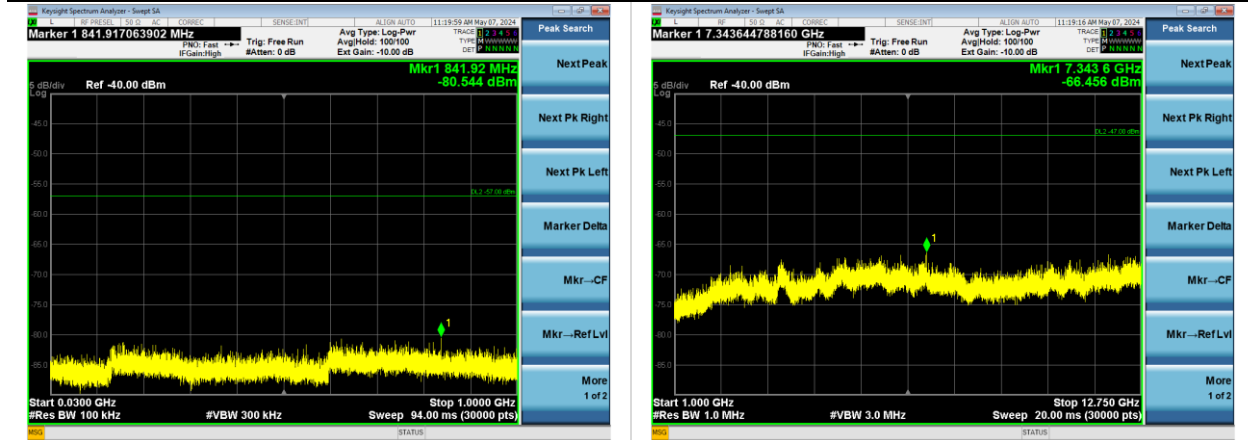

30-1000 MHz | Channel 78 | DH5

1000-12750 MHz | Channel 78 | DH5

5.1.7 Receiver Blocking

Operator	Anthony Smith	QA	Adam Alger
Temperature	22.0°C	R.H. %	53.7%
Test Date	05/29/2024	Location	Conducted RF Bench
Requirement	4.3.1.12	Method	5.4.11

Table 15: Receiver Blocking parameters receiver Category 2 equipment

Wanted signal mean power from companion device (dBm) (see notes 1 and 3)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 3)	Type of blocking signal
(-139 dBm + $10 \times \log_{10}(\text{OCBW}) + 10 \text{ dB}$) or (-74 dBm + 10 dB) whichever is less (see note 2)	2 380 2 504 2 300 2 584	-34	CW
<p>NOTE 1: OCBW is in Hz.</p> <p>NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to $P_{\min} + 26 \text{ dB}$ where P_{\min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.</p> <p>NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.</p>			

Test Parameters

Receiver Level	2	Performance Criteria	10% PER
Wanted Signal	-69.6 dBm	Signal Power Companion Device	-72.1 dBm
Blocking Signal Frequencies	2380, 2504, 2300, 2584 MHz		

Instrumentation

Asset #	Description	Manufacturer	Model #	Serial #	Date	Due Date	Status
EE 960087	Analyzer - Spectrum	Agilent	N9010A	MY53400296	4/11/2024	4/11/2025	Active Calibration
EE 960184	RF Splitter/Combiner	mini-circuits	ZFSC-2-10G +	S F707601702	12/12/2023	12/12/2024	Active Verification
CC 000314C	Vector Signal Generator	Agilent	E4438C	US 41469143	9/21/2022	9/20/2024	Active Calibration

Company: Ezurio	Page 23 of 34	Name: SONA NX611 M.2 2230, 2 MHF
Report: TR3768-165-ETSI-300-328-BTC		Model:SONA NX611M
Job: C-3768		Serial: Eng Sample

Channel	Rate	2380 MHz	2504 MHz	2300 MHz	2584 MHz	Packets
		PER %				
0	DH5	0.2	-	-	-	998
78	DH5	-	-	0.0	-	1000
0	DH5	-	0.0	-	-	1000
78	DH5	-	-	-	0.0	1000

Plots (Blocking Signal)



Company: Ezurio	Page 24 of 34	Name: SONA NX611 M.2 2230, 2 MHF
Report: TR3768-165-ETSI-300-328-BTC		Model:SONA NX611M
Job: C-3768		Serial: Eng Sample


5.2 Radiated Emissions

Description of Measurement	<p>The frequency spectrum is investigated for intentional and / or unintentional signals emanating from the EUT by use of a standardized test site and measurement antenna.</p> <p>The antenna, cable, pre-amp, and other necessary measurement system correction factors are loaded onto the EMI receiver / spectrum analyzer when the measurements are performed allowing the data to be gathered and reported as corrected values.</p> <p>The maximum emissions from the EUT are determined by turn-table azimuth rotation (360°) and scanning of the measurement antenna. Maximized levels are noted at degree values of azimuth, measurement antenna height, and measurement antenna polarity.</p>
Example Calculations	<p>Measurement (dBμV) + Cable factor (dB) + Other (dB) + Antenna Factor (dB/m) = Corrected Reading (dBμV/m)</p> <p>Margin (dB) = Limit (dBμV/m) - Corrected Reading (dBμV/m)</p> <p>Example at 4000 MHz: Reading = 40 dBμV + 3.4 dB + 0.9 dB + 6.5 dB/m = 50.8 dBμV/m Average Limit = 20 log (500) = 54 dBμV/m Margin = 54 dBμV/m - 50.8 dBμV/m = 3.2 dB</p>


Block Diagram




Setup Photos

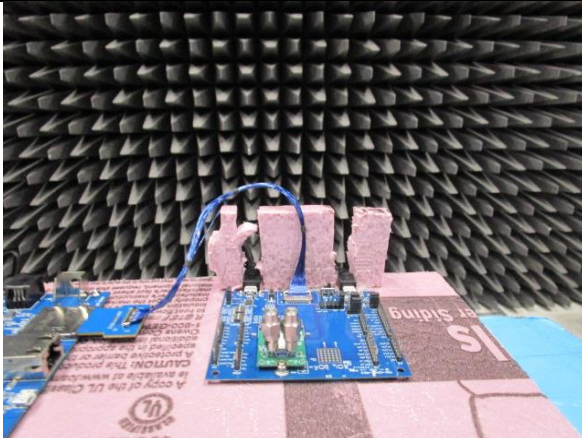


X Plane

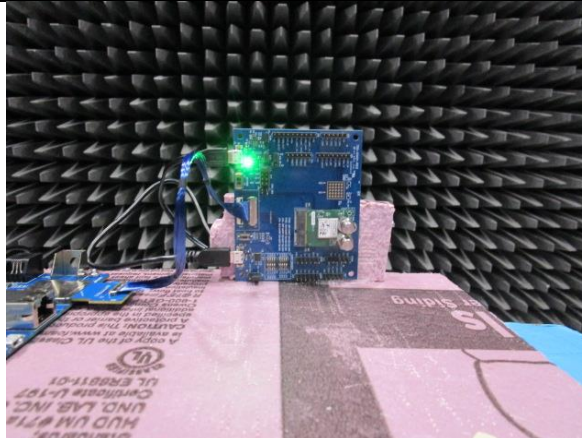


Y Plane

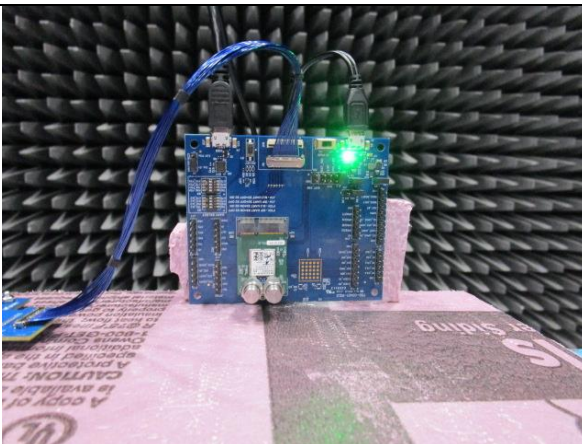

Z Plane

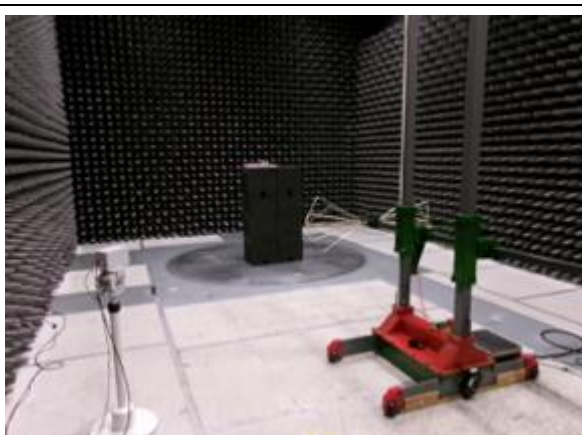

30-200 MHz

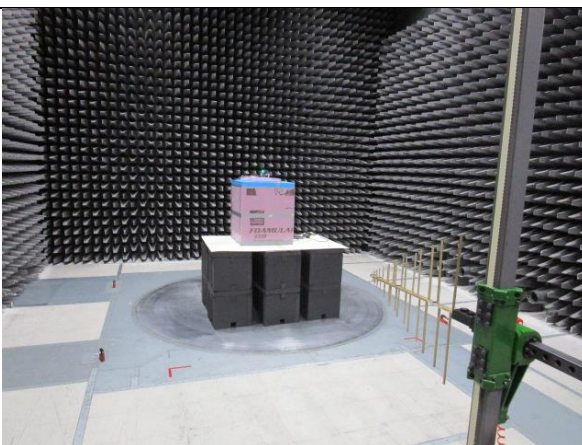


200-1000 MHz



1000-4000 MHz

Company: Ezurio	Page 26 of 34	Name: SONA NX611 M.2 2230, 2 MHF
Report: TR3768-165-ETSI-300-328-BTC		Model:SONA NX611M
Job: C-3768		Serial: Eng Sample

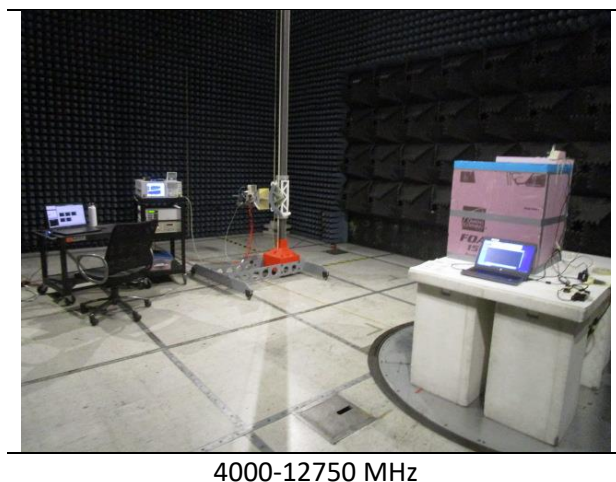

4000-12750 MHz

Instrumentation

Asset #	Description	Manufacturer	Model #	Serial #	Date	Due Date	Status
AA 960007	Antenna - Double Ridge Horn	EMCO	3115	9311-4138	8/10/2023	8/10/2024	Active Calibration
AA 960154	Filter - High Pass 2.4 GHz	KWM	HPF-L-14186	7272-02	4/11/2024	4/11/2025	Active Calibration
AA 960163	Antenna - Log Periodic	A.H. Systems, Inc.	SAS-512-2	500	8/10/2023	8/10/2024	Active Calibration
AA 960217	Antenna - Biconical	A.H. Systems, Inc.	SAS-540	852	7/17/2023	7/17/2024	Active Calibration
AA 960221	Cable	A.H. Systems, Inc.	SAC-26G-6	524	6/13/2023	6/13/2024	Active Verification
EE 960085	Analyzer - EMI Receiver	Agilent	N9038A	MY51210148	4/27/2024	4/27/2025	Active Calibration
EE 960203	Analyzer - EMI Receiver	Keysight	N9038A	MY56400072	4/11/2024	4/11/2025	Active Calibration
LSC-300	Cable	Chamber 3 Emissions	-	-	1/5/2024	1/5/2025	Active Verification
LSC-500	Cable	Chamber 5 Emissions	-	-	1/8/2024	1/8/2025	Active Verification

5.2.1 Transmitter unwanted emissions in the spurious domain

Operator	Mitchell Freund Nicole Sedmak Jon Dilley Zachary Brown	QA	Anthony Smith Adam Alger Adam Hauke Dylan Rosenfeldt
Temperature	23.3°C-25.5°C	R.H. %	36.10%-42.90%
Test Date	04/30/2024-05/10/2024	Location	Chamber 3 Chamber 5
Requirement	4.3.1.10	Method	5.4.9

Limits:

Frequency (MHz)	Maximum Power	Bandwidth
30-47	-36 dBm	100 kHz
47-74	-54 dBm	100 kHz
74-87.5	-36 dBm	100 kHz
87.5-118	-54 dBm	100 kHz
118-174	-36 dBm	100 kHz
174-230	-54 dBm	100 kHz
230-470	-36 dBm	100 kHz
470-694	-54 dBm	100 kHz
694-1000	-36 dBm	100 kHz
1000-12750	-30 dBm	1 MHz


Test Parameters


Frequency	30-12750 MHz	Distance	3 m
Detector(s)	Peak	Table Height	150 cm
RBW	<1000 MHz – 100 kHz >1000 MHz – 1 MHz	VBW	<1000 MHz – 300 kHz >1000 MHz – 3 MHz
Note	No emissions within 6 dB of the limit.		

EUT Parameters

Input Power	120 VAC @ 60 Hz	Mode	BT Tx
EUT	X, Y, Z Plane Orientations Antenna ports terminated with 50 Ω SMA terminators	AE	HP Elitebook 840G1 Ezurio – SOM60 Development Kit
Notes	6000 MHz Emission from auxiliary equipment. Not a function of the EUT.		

Worst Case Plots

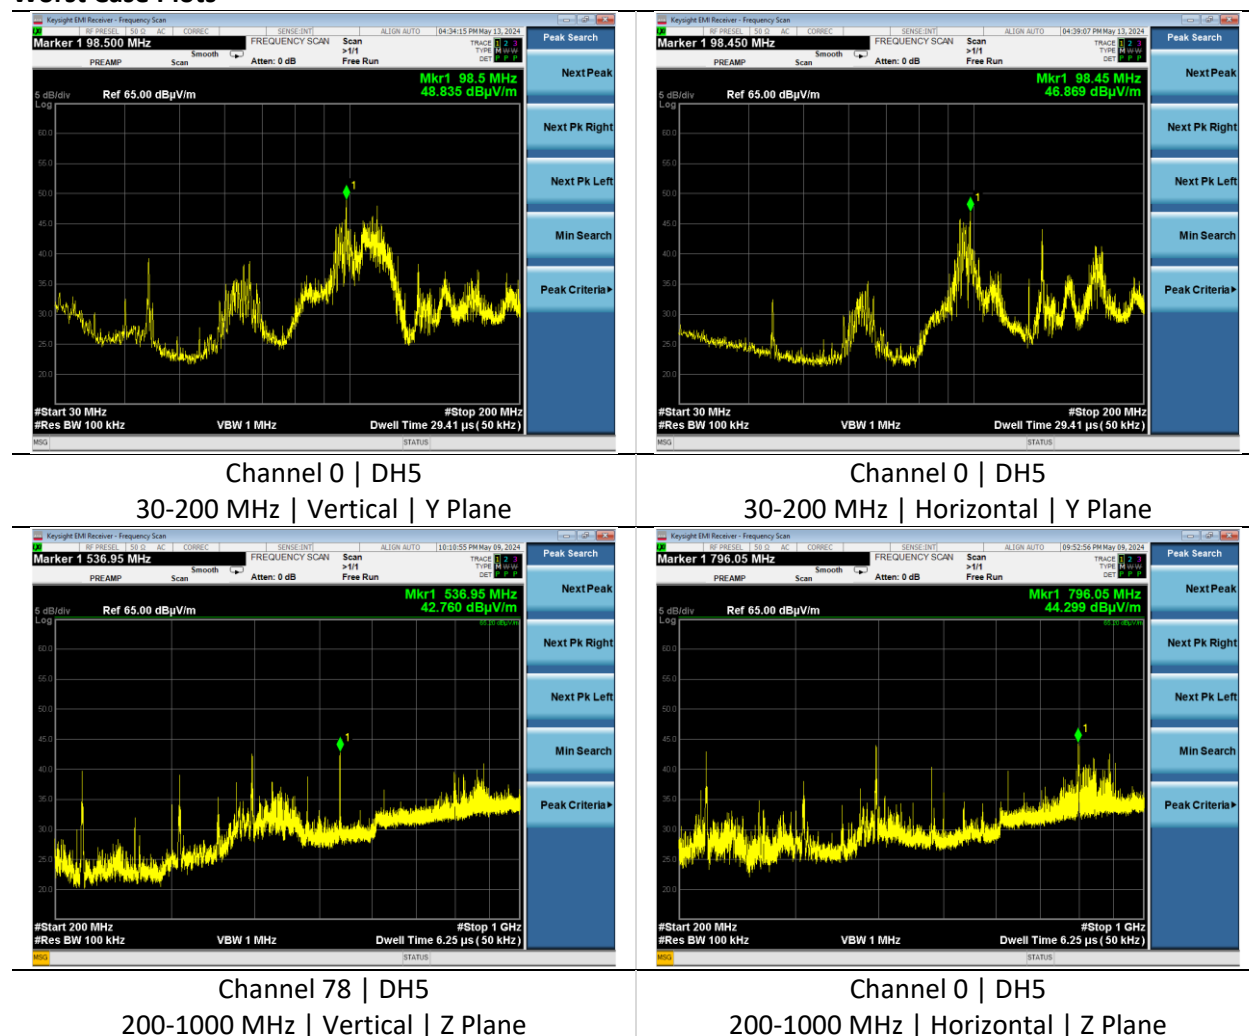


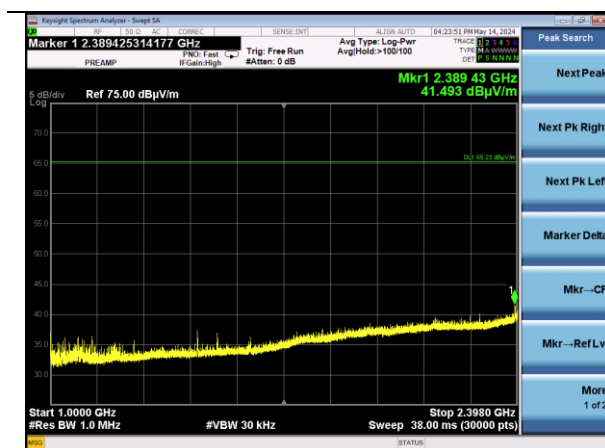


Channel 0 | 1-DH5
 1000-2398 MHz | Vertical | X Plane



Channel 78 | 1-DH5
 2485.5-4000 MHz | Horizontal | Z Plane

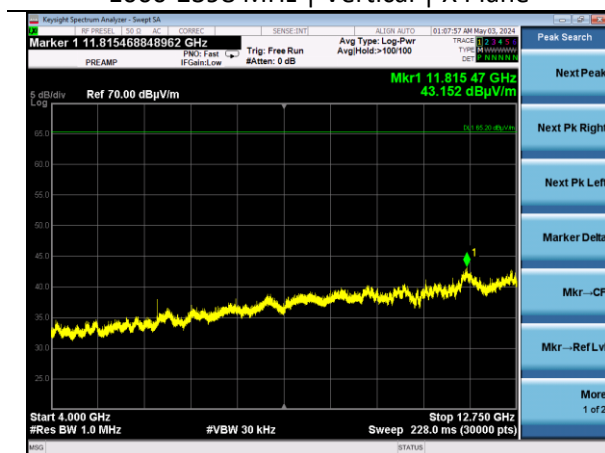

Channel 0 | DH5
 4000-12750 MHz | Horizontal | Z Plane

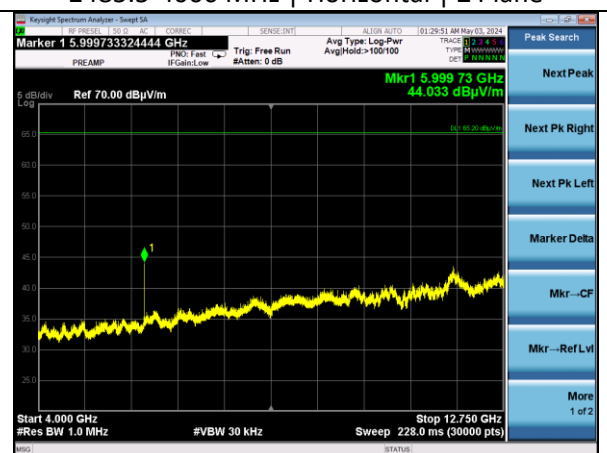

Channel 78 | DH5
 4000-12750 MHz | Vertical | Z Plane

5.2.2 Receiver spurious

Operator	Mitchell Freund Nicole Sedmak Jon Dilley Zachary Brown	QA	Anthony Smith Adam Alger Adam Hauke Dylan Rosenfeldt
Temperature	23.3°C-25.5°C	R.H. %	36.10%-42.90%
Test Date	04/30/2024-05/10/2024	Location	Chamber 3 Chamber 5
Requirement	4.3.1.11	Method	5.4.9

Limits:

Frequency (MHz)	Maximum Power	Bandwidth
30-1000	-57 dBm	100 kHz
1000-12750	-47 dBm	1 MHz


Test Parameters

Frequency	30-12750 MHz	Distance	3 m
Detector(s)	Peak	Table Height	150 cm
RBW	<1000 MHz – 100 kHz >1000 MHz – 1 MHz	VBW	<1000 MHz – 300 kHz >1000 MHz – 3 MHz
Note	No emissions within 6 dB of the limit.		


EUT Parameters

Input Power	120 VAC @ 60 Hz	Mode	BT Rx
EUT	X, Y, Z Plane Orientations Antenna ports terminated with 50 Ω SMA terminators	AE	HP Elitebook 840G1 Ezurio – SOM60 Development Kit
Notes	6000 MHz Emission from auxiliary equipment. Not a function of the EUT.		


Worst Case Plots

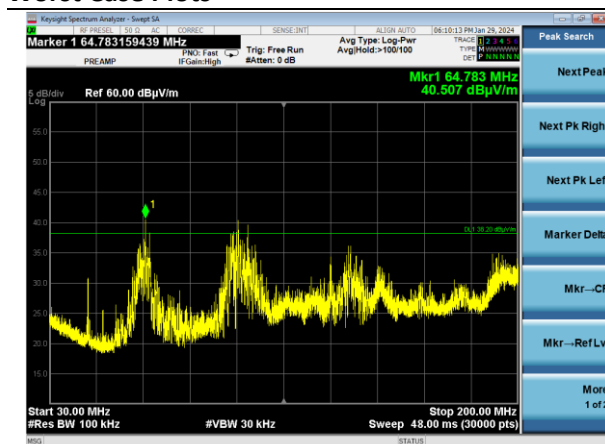


Channel 0 | DH5
30-200 MHz | Horizontal | X Plane

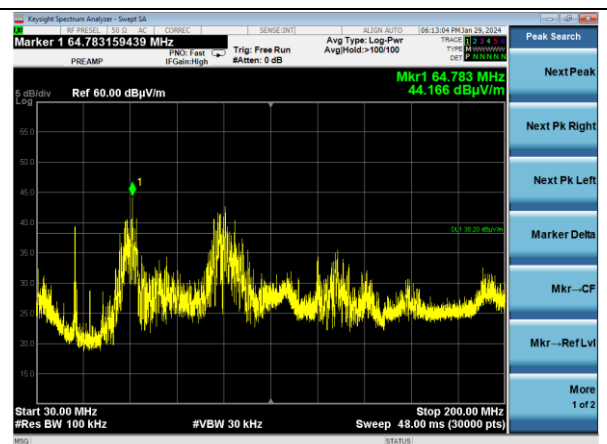


Channel 0 | DH5
30-200 MHz | Vertical | X Plane

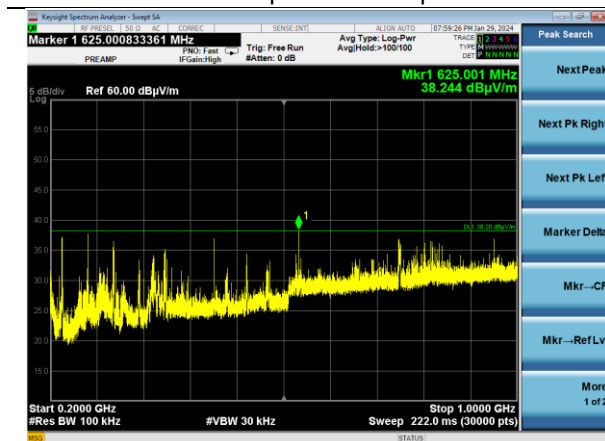


Channel 78 | DH5
200-1000 MHz | Vertical | Z Plane

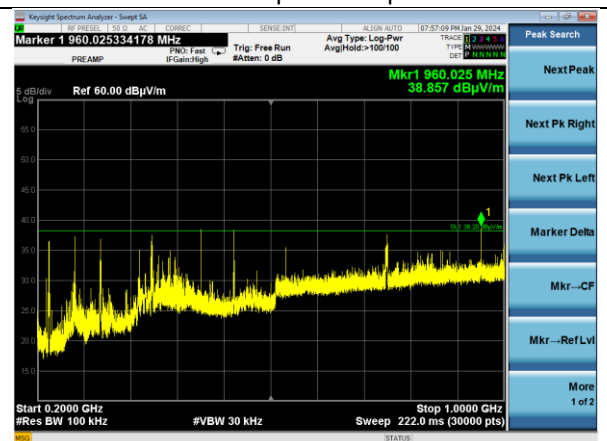


Channel 78 | DH5
200-1000 MHz | Horizontal | Z Plane

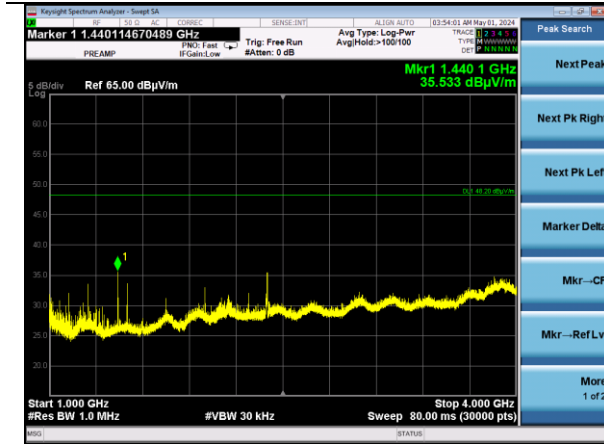


Channel 0 | DH5
1000-4000 MHz | Horizontal | X Plane

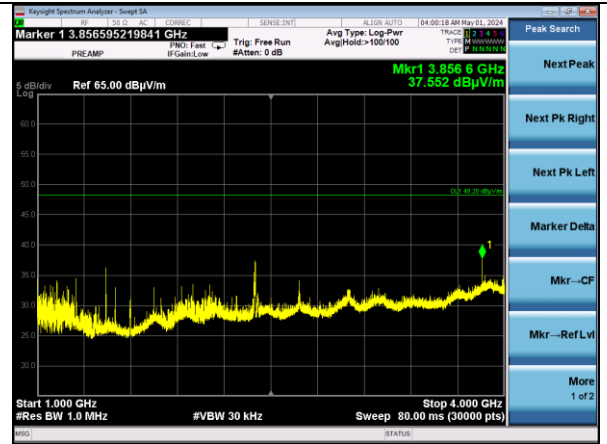

Channel 0 | DH5
1000-4000 MHz | Horizontal | X Plane

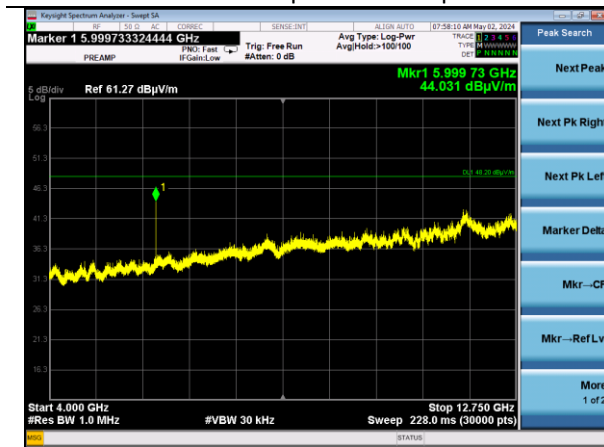

Channel 0 | DH5
4000-12750 MHz | Vertical | X Plane

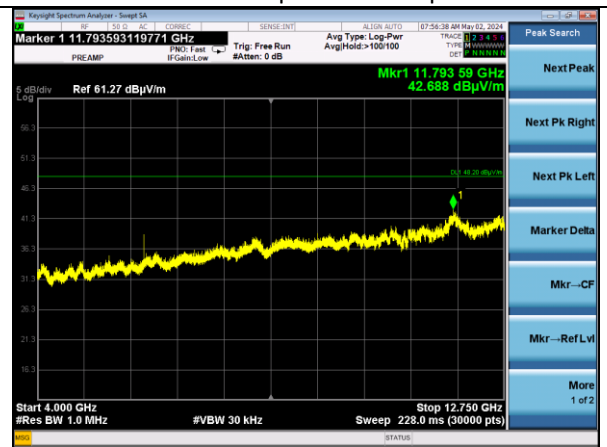

Channel 0 | DH5
4000-12750 MHz | Horizontal | X Plane

6 REVISION HISTORY

Version	Date	Notes	Person
0.0	02/11/2025	Initial Draft	Adam Alger
1	2/13/2025	Final	Adam Alger

END OF REPORT