




TR3768-166-5G-4268

Equipment Under Test:	Module, SONA NX611 M.2 2230, 1 MHF
Requirement(s):	AS/NZS 4268 ETSI EN 300 440
Test Date(s):	4/30/2024 – 1/6/2025
Prepared for:	Ezurio Attn: Brian Petted W66 N220 Commerce Ct. Cedarburg, WI 53012

Report Issued by: Anthony Smith, EMC Engineering Specialist	
Signature: 	Date: 2/12/2025
Report Reviewed by: Adam Alger, Manager EMC Laboratory	
Signature: 	Date: 2/12/2025
Report Constructed by: Anthony Smith, EMC Engineering Specialist	
Signature: 	Date: 2/12/2025

This test report may not be reproduced, except in full, without approval of Ezurio

Company: Ezurio	Page 1 of 43	Name: Module, SONA NX611 M.2 2230, 1 MHF
Report: TR3768-166-5G-4268		Model: SONA NX611M
Job: C-3768		Serial: 00047

CONTENTS

Contents	2
Ezurio Test Services in Review	3
1 Test Report Summary	4
2 Client Information	5
2.1 Equipment Under Test (EUT) Information	5
2.2 Product Description	5
2.3 Modifications Incorporated for Compliance	5
2.4 Deviations and Exclusions from Test Specifications	5
2.5 EUT Information	5
2.6 Antenna Information	6
2.7 Test Channels	6
2.8 Power Table	7
3 References	8
4 Uncertainty Summary	9
5 Test Data	10
5.1 Antenna Port Conducted Emissions	10
5.2 Radiated Emissions	36
6 Revision History	43

Ezurio Test Services in Review

The Ezurio laboratory located at W66 N220 Commerce Court Cedarburg, Wisconsin, 53012 USA is recognized through the following organizations:



A2LA – American Association for Laboratory Accreditation

Accreditation based on ISO/IEC 17025:2017 with Electrical (EMC) Scope

A2LA Certificate Number: 1255.01

Scope of accreditation includes all test methods listed herein unless otherwise noted



Federal Communications Commission (FCC) – USA

Accredited Test Firm Registration Number: 953492

Recognition of two 3 meter Semi-Anechoic Chambers



Innovation, Science and Economic Development Canada

Accredited U.S. Identification Number: US0218

Recognition of two 3 meter Semi-Anechoic Chambers

Company: Ezurio	Page 3 of 43	Name: Module, SONA NX611 M.2 2230, 1 MHF
Report: TR3768-166-5G-4268		Model: SONA NX611M
Job: C-3768		Serial: 00047

1 TEST REPORT SUMMARY

During **April 30th, 2024 through January 6th, 2025** the Equipment Under Test (EUT), **Module, SONA NX611 M.2 2230, 1 MHF**, as provided by **Ezurio** was tested to the following requirements:

ETSI EN 300 440, AS/NZS 4268 – 5 GHz WLAN

Requirements	Description	Method	Specification	Compliant
AS/NZS 4268 6.3	Equivalent isotropically radiated power	ETSI 300 440 4.2.2.3	4W e.i.r.p	Yes
AS/NZS 4268 Table 1 Note 2	Peak Power Spectral Density	ANSI C63.10	25mW/3kHz e.i.r.p	Yes
AS/NZS 4268 6.5, 6.6	Permitted range of operating frequencies	ETSI 300 440 4.2.3.3	5725-5875 MHz	Yes
AS/NZS 4268 6.4, 7.2	Unwanted emissions in the spurious domain	ETSI 300 440 4.2.4.3	25-40000 MHz	Yes
AS/NZS 4268 7.2	Adjacent channel selectivity	ETSI 300 440 4.3.3.3	-58.1 and -58.2 dBm	Yes
AS/NZS 4268 7.2	Blocking or desensitization	ETSI 300 440 4.3.4.3	-57.4 dBm	Yes
AS/NZS 4268 6.4, 7.2	Spurious radiations	ETSI 300 440 4.3.5.3	25-40000 MHz	Yes
AS/NZS 4268 7.2	Spectrum access techniques (LBT)	ETSI 300 440 4.4.2.2.2	-67.5 dBm	Yes

Notice:

The results relate only to the item tested as configured and described in this report. Any additional configurations, modes of operation, or modifications made to the equipment under test after the specified test date(s) are at the decision of the client and may not apply to the data seen in this test report.

The decision rule for Pass / Fail assessment to the specification or standard listed in this test report has been agreed upon by the client and laboratory to be as follows:

Measurement Type	Rule
Emissions – Amplitude	0.5 dB below specified limit
Emissions – Frequency	1% less than the specification
Immunity	Tested at specified level

Company: Ezurio	Page 4 of 43	Name: Module, SONA NX611 M.2 2230, 1 MHF
Report: TR3768-166-5G-4268		Model: SONA NX611M
Job: C-3768		Serial: 00047

2 CLIENT INFORMATION

Company Name	Ezurio
Contact Person	Brian Petted
Address	W66 N220 Commerce Ct. Cedarburg, WI 53012

2.1 Equipment Under Test (EUT) Information

The following information has been supplied by the client

Product Name	Module, SONA NX611 M.2 2230, 1 MHF
Model Number	453-00166
Serial Number	00047
FCC ID	SQG-SONANX611M
IC ID	3147A-SONANX611M

2.2 Product Description

The NX611 is based upon NXP IW611 Wi-Fi 6 chipset. Feature-set includes 802.11 a/b/g/n/ac/ax Wi-Fi 6 and Dual-Mode Bluetooth v5.3 (BDR + EDR + BLE).

2.3 Modifications Incorporated for Compliance

None noted at time of test

2.4 Deviations and Exclusions from Test Specifications

None noted at time of test

2.5 EUT Information

Power Supply – INPUT:100-240VAC 50/60 Hz 0.3A

OUTPUT: 5VDC 2A

Firmware - sduart_nw61x_v1.bin.se

sduart_nw61x_v1_mfg.bin.se

Company: Ezurio	Page 5 of 43	Name: Module, SONA NX611 M.2 2230, 1 MHF
Report: TR3768-166-5G-4268		Model: SONA NX611M
Job: C-3768		Serial: 00047

Ancillary Equipment

Equipment used for EUT programming (not part of the EUT)

Development Kit, SU60-SOMC 6.0, P/N: 463-00138-K1 Rev 1

Power Supply: INPUT: 100-240 VAC 50/60Hz 0.7A

OUTPUT: 12VDC 2A

HP Elitebook 840G1

Labtool Version: 1.0.0.45.6

2.6 Antenna Information

Manufacturer	Model	Part Number	Dimension	Type	Peak Gain (dBi)	
					2400-2500 MHz	4900-5925 MHz
Laird Connectivity	FlexMIMO 6E	EFD2471A3S-10MH4L	39.5mm X 39.5mm X 4.7mm	PIFA	2.2	3.8
Laird Connectivity	FlexPIFA 6E	EFB2471A3S-10MH4L	16mm X 36mm X 2.5mm	PIFA	2.2	3.9
Laird Connectivity	Mini NanoBlade Flex 6E	EMF2471A3S-10MH4L	36mm X 12mm X 0.3mm	PCB Dipole	2.4	4.4
Joymax Electronics	N/A	TWX-100BRS3B	137mm X 13mm	Dipole	2.0	4.0
Laird Connectivity	FlexPIFA	EFB2455A3S-16MHF1	38.5mm X 12.7 mm X 2.5mm	PIFA	2.5	3.0

2.7 Test Channels

Channel	Frequency (MHz)	Bandwidth (MHz)	Data Rates
149	5745	20	a, n, ac, ax
157	5785	20	a, n, ac, ax
165	5825	20	a, n, ac, ax
151	5755	40	n, ac, ax
159	5795	40	n, ac, ax
155	5775	80	ac, ax

2.8 Power Table

Mode	Channel	Power Setting
802.11a	149-165	16
802.11n	149-165	14
802.11ac	149-165	12-14
802.11ax	149-165	10-14
802.11ax RU26	149-165	10-14
802.11ax RU52	149-165	10-14
802.11ax RU106	149-165	10-14
802.11ax RU242	149-165	10-14

3 REFERENCES

Publication	Edition	Date	AMD 1	AMD 2
AS/NZS 4268	4	2017	2021	-
ETSI EN 300 440	2.1.1	2018	-	-
ANSI C63.10	-	2020	2024	-

4 UNCERTAINTY SUMMARY

Using the guidance of the following publications the calculated measurement uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level, using a coverage factor of $k = 2$.

References

CISPR 16-4-1

CISPR 16-4-2

CISPR 32

ANSI C63.23

A2LA P103

A2LA P103c

ETSI TR 100-028

Measurement Type	Configuration	Uncertainty \pm
Radiated Emissions	Biconical Antenna	5.0 dB
Radiated Emissions	Log Periodic Antenna	5.3 dB
Radiated Emissions	Horn Antenna	4.7 dB
AC Line Conducted Emissions	Artificial Mains Network	3.4 dB
Telecom Conducted Emissions	Asymmetric Artificial Network	4.9 dB
Disturbance Power Emissions	Absorbing Clamp	4.1 dB
Radiated Immunity	3 Volts/meter	2.2 dB
Conducted Immunity	CDN/EM/BCI	2.4/3.5/3.4 dB
EFT Burst/Surge	Peak pulse voltage	164 volts
ESD Immunity	15 kV level	1377 Volts

Parameter	ETSI U.C. \pm	U.C. \pm
Radio Frequency, from F0	1×10^{-7}	0.55×10^{-7}
Occupied Channel Bandwidth	5 %	2 %
RF conducted Power (Power Meter)	1.5 dB	1.2 dB
RF conducted emissions (Spectrum Analyzer)	3.0 dB	1.7 dB
All emissions, radiated	6.0 dB	5.3 dB
Temperature	1° C	0.65° C
Humidity	5 %	2.9 %
Supply voltages	3 %	1 %


Company: Ezurio	Page 9 of 43	Name: Module, SONA NX611 M.2 2230, 1 MHF
Report: TR3768-166-5G-4268		Model: SONA NX611M
Job: C-3768		Serial: 00047

5 TEST DATA


5.1 Antenna Port Conducted Emissions

Description of Measurement	<p>The direct measurement of emissions at the antenna port of the EUT is achieved by use of a RF connection to a spectrum analyzer or power meter.</p> <p>The cable and attenuator factors are loaded into the analyzer or power meter allowing for direct measurement readings without the need for further corrections.</p>
Example Calculations	<p>Measurement (dBm) + Cable factor (dB) + External Attenuator (dB) = Corrected Reading (dBm)</p> <p>Margin (dB) = Limit (dBm) – Corrected Reading (dBm)</p>

Block Diagram

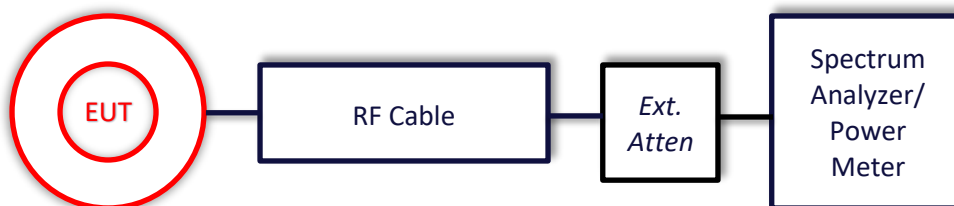

Setup Photos

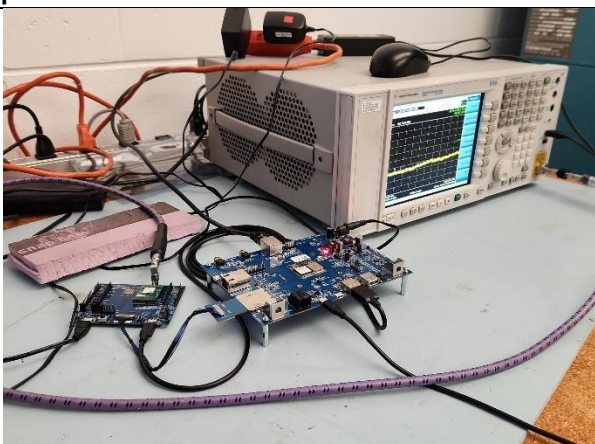

Instrumentation

Asset #	Description	Manufacturer	Model #	Serial #	Date	Due Date	Status
AA 960144	Cable	Gore	EKD01D010720	5800373	1/28/2025	1/28/2026	Active Verification
AA 960172	Cable	A.H. Systems, Inc.	SAC-26G-1	387	1/28/2025	1/28/2026	Active Verification
EE 960087	Analyzer - Spectrum	Agilent	N9010A	MY53400296	4/10/2024	4/10/2025	Active Calibration
EE 960088	Analyzer - EMI Receiver	Agilent	N9038A	MY51210138	12/10/2024	12/10/2025	Active Calibration
EE 960090	Meter - RF Power	Anritsu	ML2495A	1335006	4/11/2024	4/11/2025	Active Calibration
EE 960091	Sensor - RF Power	Anritsu	MA2491A	1249277	4/11/2024	4/11/2025	Active Calibration

5.1.1 Equivalent isotropically radiated power (e.i.r.p.)

Operator	Anthony Smith	QA	Dylan Rosenfeldt
Temperature	20.2, 20.7°C	R.H. %	19.9, 28.9
Test Date	12/5/2024, 1/6/2025	Location	Thermotron Temp Chamber
Requirement	AS/NZS 4268 6.3 ETSI 300 440 4.2.2.4	Method	ETSI 300 440 4.2.2.3

Limits: The transmitter maximum e.i.r.p. under normal and extreme test conditions is 4 W

Test Parameters

Frequency	5725-5850 MHz	Setup	Antenna Port
Operating Temperature	-40.0°C to +85.0°C	Sample Speed	32 MS/s

EUT Parameters

Input Power	120 VAC @ 60 Hz	Mode	5GHz WLAN Tx
Frequency	5745-5825 MHz	Channel	See 2.7

Output Power Measurements +21.5°C

Nominal Bandwidth (MHz)	Channel	Mode	Data Rate	Measurement (dBm)	Antenna Gain (dBi)	EIRP (dBm/MHz)	Limit (dBm)	Margin (dB)	Power Setting
20	149	802.11a	6m	18.5	4.4	22.9	36.0	13.1	16
20	149	802.11n	MCS0	16.5	4.4	20.9	36.0	15.1	14
20	149	802.11ac	MCS0	16.4	4.4	20.8	36.0	15.2	14
20	149	802.11ax	MCS0	16.7	4.4	21.1	36.0	14.9	14
20	149	802.11ax	MCS9	14.7	4.4	19.1	36.0	16.9	12
20	149	802.11ax	MCS11	12.7	4.4	17.1	36.0	18.9	10
20	157	802.11a	6m	16.9	4.4	21.3	36.0	14.7	16
20	157	802.11n	MCS0	14.9	4.4	19.3	36.0	16.7	14
20	157	802.11ac	MCS0	14.8	4.4	19.2	36.0	16.8	14
20	157	802.11ax	MCS0	15.1	4.4	19.5	36.0	16.5	14
20	157	802.11ax	MCS9	13.3	4.4	17.7	36.0	18.3	12
20	157	802.11ax	MCS11	11.1	4.4	15.5	36.0	20.5	10
20	165	802.11a	6m	17.3	4.4	21.7	36.0	14.3	16
20	165	802.11n	MCS0	15.2	4.4	19.6	36.0	16.4	14
20	165	802.11ac	MCS0	15.2	4.4	19.6	36.0	16.4	14
20	165	802.11ax	MCS0	15.5	4.4	19.9	36.0	16.1	14
20	165	802.11ax	MCS9	13.7	4.4	18.1	36.0	17.9	12
20	165	802.11ax	MCS11	11.6	4.4	16.0	36.0	20.0	10
40	151	802.11n	MCS0	16.2	4.4	20.6	36.0	15.4	14
40	151	802.11ac	MCS0	16.3	4.4	20.7	36.0	15.3	14
40	151	802.11ac	MCS9	14.4	4.4	18.8	36.0	17.2	12
40	151	802.11ax	MCS0	16.7	4.4	21.1	36.0	14.9	14
40	151	802.11ax	MCS9	14.7	4.4	19.1	36.0	16.9	12
40	151	802.11ax	MCS11	12.6	4.4	17.0	36.0	19.0	10
40	159	802.11n	MCS0	14.6	4.4	19.0	36.0	17.0	14
40	159	802.11ac	MCS0	14.5	4.4	18.9	36.0	17.1	14
40	159	802.11ac	MCS9	12.8	4.4	17.2	36.0	18.8	12
40	159	802.11ax	MCS0	14.9	4.4	19.3	36.0	16.7	14
40	159	802.11ax	MCS9	13.0	4.4	17.4	36.0	18.6	12
40	159	802.11ax	MCS11	10.9	4.4	15.3	36.0	20.7	10
80	155	802.11ac	MCS0	15.8	4.4	20.2	36.0	15.8	14
80	155	802.11ac	MCS9	14.0	4.4	18.4	36.0	17.6	12
80	155	802.11ax	MCS0	16.2	4.4	20.6	36.0	15.4	14
80	155	802.11ax	MCS9	14.1	4.4	18.5	36.0	17.5	12
80	155	802.11ax	MCS11	12.0	4.4	16.4	36.0	19.6	10
20	149	802.11ax	MCS0 RU26	16.7	4.4	21.1	36.0	14.9	14
20	149	802.11ax	MCS9 RU26	14.7	4.4	19.1	36.0	16.9	12
20	149	802.11ax	MCS11 RU26	12.7	4.4	17.1	36.0	18.9	10
20	157	802.11ax	MCS0 RU26	15.6	4.4	20.0	36.0	16.0	14
20	157	802.11ax	MCS9 RU26	13.7	4.4	18.1	36.0	17.9	12
20	157	802.11ax	MCS11 RU26	11.7	4.4	16.1	36.0	19.9	10
20	165	802.11ax	MCS0 RU26	15.2	4.4	19.6	36.0	16.4	14
20	165	802.11ax	MCS9 RU26	13.3	4.4	17.7	36.0	18.3	12
20	165	802.11ax	MCS11 RU26	11.2	4.4	15.6	36.0	20.4	10
40	151	802.11ax	MCS0 RU26	15.8	4.4	20.2	36.0	15.8	14
40	151	802.11ax	MCS9 RU26	14.0	4.4	18.4	36.0	17.6	12
40	151	802.11ax	MCS11 RU26	11.9	4.4	16.3	36.0	19.7	10
40	159	802.11ax	MCS0 RU26	14.7	4.4	19.1	36.0	16.9	14
40	159	802.11ax	MCS9 RU26	12.7	4.4	17.1	36.0	18.9	12
40	159	802.11ax	MCS11 RU26	10.8	4.4	15.2	36.0	20.8	10
80	155	802.11ax	MCS0 RU26	17.4	4.4	21.8	36.0	14.2	14
80	155	802.11ax	MCS9 RU26	15.3	4.4	19.7	36.0	16.3	12
80	155	802.11ax	MCS11 RU26	13.4	4.4	17.8	36.0	18.2	10

Output Power Measurements +85.0°C

Nominal Bandwidth (MHz)	Channel	Mode	Data Rate	Measurement (dBm)	Antenna Gain (dBi)	EIRP (dBm/MHz)	Limit (dBm)	Margin (dB)	Power Setting
20	149	802.11a	6m	16.2	4.4	20.6	36.0	15.4	16
20	149	802.11n	MCS0	14.4	4.4	18.8	36.0	17.2	14
20	149	802.11ac	MCS0	14.5	4.4	18.9	36.0	17.1	14
20	149	802.11ax	MCS0	14.7	4.4	19.1	36.0	16.9	14
20	149	802.11ax	MCS9	13.3	4.4	17.7	36.0	18.3	12
20	149	802.11ax	MCS11	11.5	4.4	15.9	36.0	20.1	10
20	157	802.11a	6m	14.3	4.4	18.7	36.0	17.3	16
20	157	802.11n	MCS0	12.6	4.4	17.0	36.0	19.0	14
20	157	802.11ac	MCS0	12.6	4.4	17.0	36.0	19.0	14
20	157	802.11ax	MCS0	12.9	4.4	17.3	36.0	18.7	14
20	157	802.11ax	MCS9	11.5	4.4	15.9	36.0	20.1	12
20	157	802.11ax	MCS11	9.6	4.4	14.0	36.0	22.0	10
20	165	802.11a	6m	14.8	4.4	19.2	36.0	16.8	16
20	165	802.11n	MCS0	13.2	4.4	17.6	36.0	18.4	14
20	165	802.11ac	MCS0	13.2	4.4	17.6	36.0	18.4	14
20	165	802.11ax	MCS0	13.4	4.4	17.8	36.0	18.2	14
20	165	802.11ax	MCS9	12.0	4.4	16.4	36.0	19.6	12
20	165	802.11ax	MCS11	10.1	4.4	14.5	36.0	21.5	10
40	151	802.11n	MCS0	14.3	4.4	18.7	36.0	17.3	14
40	151	802.11ac	MCS0	14.5	4.4	18.9	36.0	17.1	14
40	151	802.11ac	MCS9	13.0	4.4	17.4	36.0	18.6	12
40	151	802.11ax	MCS0	14.6	4.4	19.0	36.0	17.0	14
40	151	802.11ax	MCS9	13.0	4.4	17.4	36.0	18.6	12
40	151	802.11ax	MCS11	11.3	4.4	15.7	36.0	20.3	10
40	159	802.11n	MCS0	12.5	4.4	16.9	36.0	19.1	14
40	159	802.11ac	MCS0	12.6	4.4	17.0	36.0	19.0	14
40	159	802.11ac	MCS9	11.2	4.4	15.6	36.0	20.4	12
40	159	802.11ax	MCS0	12.8	4.4	17.2	36.0	18.8	14
40	159	802.11ax	MCS9	11.4	4.4	15.8	36.0	20.2	12
40	159	802.11ax	MCS11	9.6	4.4	14.0	36.0	22.0	10
80	155	802.11ac	MCS0	13.8	4.4	18.2	36.0	17.8	14
80	155	802.11ac	MCS9	12.2	4.4	16.6	36.0	19.4	12
80	155	802.11ax	MCS0	14.0	4.4	18.4	36.0	17.6	14
80	155	802.11ax	MCS9	12.5	4.4	16.9	36.0	19.1	12
80	155	802.11ax	MCS11	10.7	4.4	15.1	36.0	20.9	10
20	149	802.11ax	MCS0 RU26	15.0	4.4	19.4	36.0	16.6	14
20	149	802.11ax	MCS9 RU26	13.0	4.4	17.4	36.0	18.6	12
20	149	802.11ax	MCS11 RU26	11.2	4.4	15.6	36.0	20.4	10
20	157	802.11ax	MCS0 RU26	13.2	4.4	17.6	36.0	18.4	14
20	157	802.11ax	MCS9 RU26	11.7	4.4	16.1	36.0	19.9	12
20	157	802.11ax	MCS11 RU26	9.8	4.4	14.2	36.0	21.8	10
20	165	802.11ax	MCS0 RU26	12.9	4.4	17.3	36.0	18.7	14
20	165	802.11ax	MCS9 RU26	11.4	4.4	15.8	36.0	20.2	12
20	165	802.11ax	MCS11 RU26	9.5	4.4	13.9	36.0	22.1	10
40	151	802.11ax	MCS0 RU26	14.2	4.4	18.6	36.0	17.4	14
40	151	802.11ax	MCS9 RU26	12.5	4.4	16.9	36.0	19.1	12
40	151	802.11ax	MCS11 RU26	10.6	4.4	15.0	36.0	21.0	10
40	159	802.11ax	MCS0 RU26	12.6	4.4	17.0	36.0	19.0	14
40	159	802.11ax	MCS9 RU26	11.1	4.4	15.5	36.0	20.5	12
40	159	802.11ax	MCS11 RU26	9.1	4.4	13.5	36.0	22.5	10
80	155	802.11ax	MCS0 RU26	15.6	4.4	20.0	36.0	16.0	14
80	155	802.11ax	MCS9 RU26	13.7	4.4	18.1	36.0	17.9	12
80	155	802.11ax	MCS11 RU26	11.9	4.4	16.3	36.0	19.7	10

Output Power Measurements -40.0°C

Nominal Bandwidth (MHz)	Channel	Mode	Data Rate	Measurement (dBm)	Antenna Gain (dBi)	EIRP (dBm/MHz)	Limit (dBm)	Margin (dB)	Power Setting
20	149	802.11a	6m	17.6	4.4	22.0	36.0	14.0	16
20	149	802.11n	MCS0	15.6	4.4	20.0	36.0	16.0	14
20	149	802.11ac	MCS0	15.5	4.4	19.9	36.0	16.1	14
20	149	802.11ax	MCS0	15.8	4.4	20.2	36.0	15.8	14
20	149	802.11ax	MCS9	13.9	4.4	18.3	36.0	17.7	12
20	149	802.11ax	MCS11	11.8	4.4	16.2	36.0	19.8	10
20	157	802.11a	6m	16.4	4.4	20.8	36.0	15.2	16
20	157	802.11n	MCS0	14.3	4.4	18.7	36.0	17.3	14
20	157	802.11ac	MCS0	14.3	4.4	18.7	36.0	17.3	14
20	157	802.11ax	MCS0	14.6	4.4	19.0	36.0	17.0	14
20	157	802.11ax	MCS9	12.6	4.4	17.0	36.0	19.0	12
20	157	802.11ax	MCS11	10.6	4.4	15.0	36.0	21.0	10
20	165	802.11a	6m	16.6	4.4	21.0	36.0	15.0	16
20	165	802.11n	MCS0	14.5	4.4	18.9	36.0	17.1	14
20	165	802.11ac	MCS0	14.5	4.4	18.9	36.0	17.1	14
20	165	802.11ax	MCS0	14.8	4.4	19.2	36.0	16.8	14
20	165	802.11ax	MCS9	12.9	4.4	17.3	36.0	18.7	12
20	165	802.11ax	MCS11	10.9	4.4	15.3	36.0	20.7	10
40	151	802.11n	MCS0	15.5	4.4	19.9	36.0	16.1	14
40	151	802.11ac	MCS0	15.5	4.4	19.9	36.0	16.1	14
40	151	802.11ac	MCS9	13.6	4.4	18.0	36.0	18.0	12
40	151	802.11ax	MCS0	15.9	4.4	20.3	36.0	15.7	14
40	151	802.11ax	MCS9	13.9	4.4	18.3	36.0	17.7	12
40	151	802.11ax	MCS11	11.7	4.4	16.1	36.0	19.9	10
40	159	802.11n	MCS0	14.0	4.4	18.4	36.0	17.6	14
40	159	802.11ac	MCS0	14.0	4.4	18.4	36.0	17.6	14
40	159	802.11ac	MCS9	12.0	4.4	16.4	36.0	19.6	12
40	159	802.11ax	MCS0	14.3	4.4	18.7	36.0	17.3	14
40	159	802.11ax	MCS9	12.3	4.4	16.7	36.0	19.3	12
40	159	802.11ax	MCS11	10.2	4.4	14.6	36.0	21.4	10
80	155	802.11ac	MCS0	14.9	4.4	19.3	36.0	16.7	14
80	155	802.11ac	MCS9	13.1	4.4	17.5	36.0	18.5	12
80	155	802.11ax	MCS0	15.3	4.4	19.7	36.0	16.3	14
80	155	802.11ax	MCS9	13.4	4.4	17.8	36.0	18.2	12
80	155	802.11ax	MCS11	11.1	4.4	15.5	36.0	20.5	10
20	149	802.11ax	MCS0 RU26	14.9	4.4	19.3	36.0	16.7	14
20	149	802.11ax	MCS9 RU26	13.1	4.4	17.5	36.0	18.5	12
20	149	802.11ax	MCS11 RU26	10.9	4.4	15.3	36.0	20.7	10
20	157	802.11ax	MCS0 RU26	14.3	4.4	18.7	36.0	17.3	14
20	157	802.11ax	MCS9 RU26	12.5	4.4	16.9	36.0	19.1	12
20	157	802.11ax	MCS11 RU26	10.4	4.4	14.8	36.0	21.2	10
20	165	802.11ax	MCS0 RU26	13.7	4.4	18.1	36.0	17.9	14
20	165	802.11ax	MCS9 RU26	11.9	4.4	16.3	36.0	19.7	12
20	165	802.11ax	MCS11 RU26	10.0	4.4	14.4	36.0	21.6	10
40	151	802.11ax	MCS0 RU26	14.2	4.4	18.6	36.0	17.4	14
40	151	802.11ax	MCS9 RU26	12.3	4.4	16.7	36.0	19.3	12
40	151	802.11ax	MCS11 RU26	10.2	4.4	14.6	36.0	21.4	10
40	159	802.11ax	MCS0 RU26	13.4	4.4	17.8	36.0	18.2	14
40	159	802.11ax	MCS9 RU26	11.7	4.4	16.1	36.0	19.9	12
40	159	802.11ax	MCS11 RU26	9.5	4.4	13.9	36.0	22.1	10
80	155	802.11ax	MCS0 RU26	15.6	4.4	20.0	36.0	16.0	14
80	155	802.11ax	MCS9 RU26	13.5	4.4	17.9	36.0	18.1	12
80	155	802.11ax	MCS11 RU26	11.4	4.4	15.8	36.0	20.2	10

5.1.2 Power Spectral Density

Operator	Anthony Smith	QA	Dylan Rosenfeldt
Temperature	20.2, 20.7°C	R.H. %	19.9, 28.9
Test Date	12/5/2024, 1/6/2025	Location	Thermotron Temp Chamber
Requirement	AS/NZS 4268 Table 1 Note 2	Method	ANSI C63.10 11.10 PKPSD

Limits: The radiated peak power spectral density in any 3 kHz is limited to 25 mW per 3 kHz.

Test Parameters

Frequency	5725-5850 MHz	Detector	Peak, Max Hold
RBW	3 kHz	VBW	9.1 kHz
Notes	Conducted Peak PSD + Peak Antenna Gain = Radiated Peak PSD		

EUT Parameters

Input Power	120 VAC @ 60 Hz	Mode	5 GHz WLAN Tx
Frequency	5725-5850 MHz	Channel	See 2.7

Measurements

Nominal Bandwidth	Channel	Mode	Data Rate	Measurement (dBm/3kHz)	Antenna Gain (dBi)	Corrected Peak PSD (dBm/3kHz)	Limit (dBm/3kHz)	Margin (dB)	Power Setting
20	149	802.11a	6m	-8.4	4.4	-4.0	14.0	18.0	16
20	157	802.11a	6m	-7.9	4.4	-3.5	14.0	17.5	16
20	165	802.11a	6m	-7.9	4.4	-3.5	14.0	17.5	16
20	149	802.11a	54m	-5.5	4.4	-1.1	14.0	15.1	16
20	157	802.11a	54m	-5.8	4.4	-1.4	14.0	15.4	16
20	165	802.11a	54m	-6.4	4.4	-2.0	14.0	16.0	16
20	149	802.11n	MCS0	-9.5	4.4	-5.1	14.0	19.1	14
20	157	802.11n	MCS0	-8.6	4.4	-4.2	14.0	18.2	14
20	165	802.11n	MCS0	-10.0	4.4	-5.6	14.0	19.6	14
20	149	802.11n	MCS7	-9.1	4.4	-4.7	14.0	18.7	14
20	157	802.11n	MCS7	-8.4	4.4	-4.0	14.0	18.0	14
20	165	802.11n	MCS7	-9.4	4.4	-5.0	14.0	19.0	14
20	149	802.11ac	MCS0	-9.4	4.4	-5.0	14.0	19.0	14
20	157	802.11ac	MCS0	-9.7	4.4	-5.3	14.0	19.3	14
20	165	802.11ac	MCS0	-9.5	4.4	-5.1	14.0	19.1	14
20	149	802.11ac	MCS8	-9.0	4.4	-4.6	14.0	18.6	14
20	157	802.11ac	MCS8	-7.8	4.4	-3.4	14.0	17.4	14
20	165	802.11ac	MCS8	-10.0	4.4	-5.6	14.0	19.6	14
20	149	802.11ax	MCS0	-10.4	4.4	-6.0	14.0	20.0	14
20	157	802.11ax	MCS0	-9.1	4.4	-4.7	14.0	18.7	14
20	165	802.11ax	MCS0	-10.9	4.4	-6.5	14.0	20.5	14
20	149	802.11ax	MCS7	-9.5	4.4	-5.1	14.0	19.1	14
20	157	802.11ax	MCS7	-9.1	4.4	-4.7	14.0	18.7	14
20	165	802.11ax	MCS7	-10.4	4.4	-6.0	14.0	20.0	14
20	149	802.11ax	MCS9	-10.6	4.4	-6.2	14.0	20.2	12
20	157	802.11ax	MCS9	-10.1	4.4	-5.7	14.0	19.7	12
20	165	802.11ax	MCS9	-10.7	4.4	-6.3	14.0	20.3	12
20	149	802.11ax	MCS11	-12.6	4.4	-8.2	14.0	22.2	10
20	157	802.11ax	MCS11	-12.5	4.4	-8.1	14.0	22.1	10
20	165	802.11ax	MCS11	-12.8	4.4	-8.4	14.0	22.4	10
40	151	802.11n	MCS0	-11.8	4.4	-7.4	14.0	21.4	14
40	159	802.11n	MCS0	-11.9	4.4	-7.5	14.0	21.5	14
40	151	802.11n	MCS7	-10.7	4.4	-6.3	14.0	20.3	14
40	159	802.11n	MCS7	-9.9	4.4	-5.5	14.0	19.5	14
40	151	802.11ac	MCS0	-11.6	4.4	-7.2	14.0	21.2	14
40	159	802.11ac	MCS0	-12.1	4.4	-7.7	14.0	21.7	14
40	151	802.11ac	MCS7	-10.2	4.4	-5.8	14.0	19.8	14
40	159	802.11ac	MCS7	-10.3	4.4	-5.9	14.0	19.9	14
40	151	802.11ac	MCS9	-11.6	4.4	-7.2	14.0	21.2	12
40	159	802.11ac	MCS9	-11.4	4.4	-7.0	14.0	21.0	12
40	151	802.11ax	MCS0	-12.3	4.4	-7.9	14.0	21.9	14
40	159	802.11ax	MCS0	-12.3	4.4	-7.9	14.0	21.9	14
40	151	802.11ax	MCS7	-10.8	4.4	-6.4	14.0	20.4	14
40	159	802.11ax	MCS7	-10.0	4.4	-5.6	14.0	19.6	14
40	151	802.11ax	MCS9	-11.9	4.4	-7.5	14.0	21.5	12
40	159	802.11ax	MCS9	-11.9	4.4	-7.5	14.0	21.5	12
40	151	802.11ax	MCS11	-13.1	4.4	-8.7	14.0	22.7	10
40	159	802.11ax	MCS11	-14.0	4.4	-9.6	14.0	23.6	10
80	155	802.11ac	MCS0	-14.7	4.4	-10.3	14.0	24.3	14
80	155	802.11ac	MCS7	-11.9	4.4	-7.5	14.0	21.5	14
80	155	802.11ac	MCS9	-12.5	4.4	-8.1	14.0	22.1	12
80	155	802.11ax	MCS0	-14.1	4.4	-9.7	14.0	23.7	14
80	155	802.11ax	MCS7	-11.5	4.4	-7.1	14.0	21.1	14
80	155	802.11ax	MCS9	-14.4	4.4	-10.0	14.0	24.0	12
80	155	802.11ax	MCS11	-15.3	4.4	-10.9	14.0	24.9	10

Company: Ezurio

Report: TR3768-166-5G-4268

Job: C-3768


Name: Module, SONA NX611 M.2 2230, 1 MHF

Model: SONA NX611M


Serial: 00047

20	149	802.11ax	MCS0 RU26	-1.4	4.4	3.0	14.0	11.0	14
20	157	802.11ax	MCS0 RU26	-1.0	4.4	3.4	14.0	10.6	14
20	165	802.11ax	MCS0 RU26	-0.9	4.4	3.5	14.0	10.5	14
20	149	802.11ax	MCS7 RU26	-0.3	4.4	4.1	14.0	9.9	14
20	157	802.11ax	MCS7 RU26	-0.4	4.4	4.0	14.0	10.0	14
20	165	802.11ax	MCS7 RU26	-1.8	4.4	2.6	14.0	11.4	14
20	149	802.11ax	MCS9 RU26	-2.7	4.4	1.7	14.0	12.3	12
20	157	802.11ax	MCS9 RU26	-2.5	4.4	1.9	14.0	12.1	12
20	165	802.11ax	MCS9 RU26	-3.1	4.4	1.3	14.0	12.7	12
20	149	802.11ax	MCS11 RU26	-4.2	4.4	0.2	14.0	13.8	10
20	157	802.11ax	MCS11 RU26	-4.2	4.4	0.2	14.0	13.8	10
20	165	802.11ax	MCS11 RU26	-3.2	4.4	1.2	14.0	12.8	10
40	151	802.11ax	MCS0 RU26	-1.1	4.4	3.3	14.0	10.7	14
40	159	802.11ax	MCS0 RU26	-1.3	4.4	3.1	14.0	10.9	14
40	151	802.11ax	MCS7 RU26	-2.1	4.4	2.3	14.0	11.7	14
40	159	802.11ax	MCS7 RU26	-1.4	4.4	3.0	14.0	11.0	14
40	151	802.11ax	MCS9 RU26	-3.9	4.4	0.5	14.0	13.5	12
40	159	802.11ax	MCS9 RU26	-3.9	4.4	0.5	14.0	13.5	12
40	151	802.11ax	MCS11 RU26	-5.2	4.4	-0.8	14.0	14.8	10
40	159	802.11ax	MCS11 RU26	-6.1	4.4	-1.7	14.0	15.7	10
80	155	802.11ax	MCS0 RU26	-0.4	4.4	4.0	14.0	10.0	14
80	155	802.11ax	MCS7 RU26	-1.0	4.4	3.4	14.0	10.6	14
80	155	802.11ax	MCS9 RU26	-3.3	4.4	1.1	14.0	12.9	12
80	155	802.11ax	MCS11 RU26	-4.8	4.4	-0.4	14.0	14.4	10


Plots

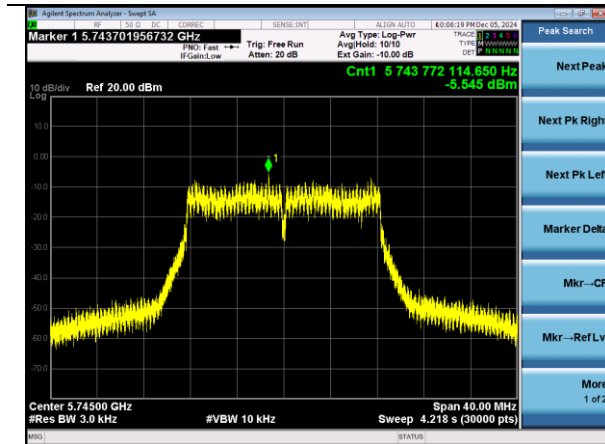


802.11a | Channel 149 | 54 Mbps

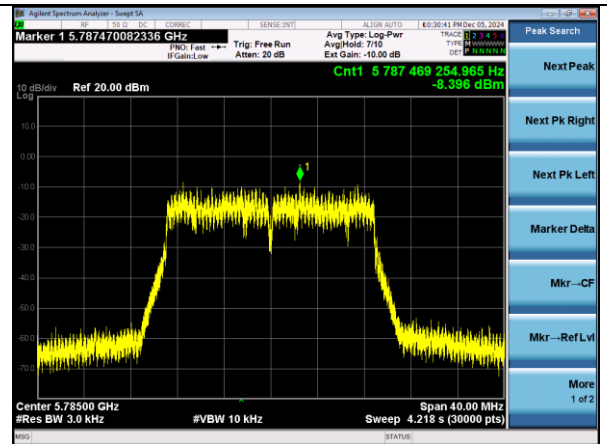


802.11n | Channel 157 | MCS7

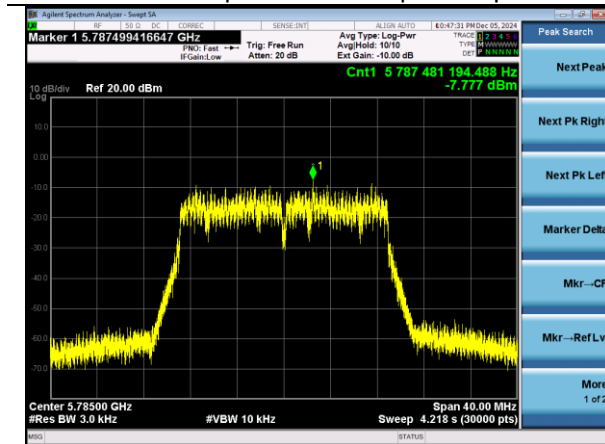

802.11ac | Channel 157 | MCS8

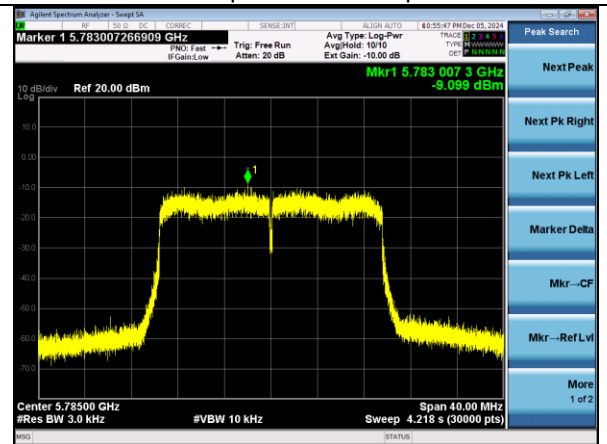

802.11ax | Channel 157 | MCS0

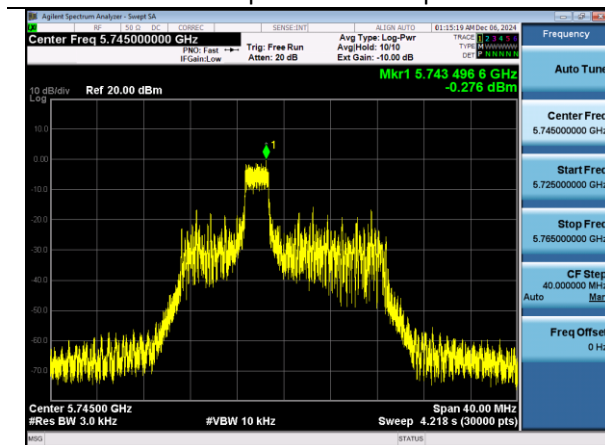

802.11ax | Channel 149 | MCS7 RU26

Company: Ezurio	Page 19 of 43	Name: Module, SONA NX611 M.2 2230, 1 MHF
Report: TR3768-166-5G-4268		Model: SONA NX611M
Job: C-3768		Serial: 00047

5.1.3 Permitted range of operating frequencies

Operator	Anthony Smith	QA	Dylan Rosenfeldt
Temperature	21.6-23.0°C	R.H. %	31.1-48.6%
Test Date	6/20/2024, 6/21/2024, 6/24/2024, 7/1/2024, 7/2/2024, 8/14/2024, 8/23/2024, 12/4/2024	Location	Thermotron Temp Chamber
Requirement	AS/NZS 4268 6.5, 6.6 ETSI 300 440 4.2.3.5	Method	ETSI 300 440 4.2.3.3

Limits: The occupied bandwidth of the transmitter shall fall within the assigned frequency band

Test Parameters

Frequency	5725-5875 MHz	Setup	Antenna Port
Detector(s)	Peak		
Example Calculation	FH – FL = Frequency Range		

Instrumentation

Asset #	Description	Manufacturer	Model #	Serial #	Date	Due Date	Status
AA 960144	Cable	Gore	EKD01D010720	5800373	1/28/2025	1/28/2026	Active Verification
AA 960172	Cable	A.H. Systems, Inc.	SAC-26G-1	387	1/28/2025	1/28/2026	Active Verification
EE 960087	Analyzer - Spectrum	Agilent	N9010A	MY53400296	4/10/2024	4/10/2025	Active Calibration
EE 960088	Analyzer - EMI Receiver	Agilent	N9038A	MY51210138	12/10/2024	12/10/2025	Active Calibration
EE 960090	Meter - RF Power	Anritsu	ML2495A	1335006	4/11/2024	4/11/2025	Active Calibration
EE 960091	Sensor - RF Power	Anritsu	MA2491A	1249277	4/11/2024	4/11/2025	Active Calibration


EUT Parameters

Input Power	120 VAC @ 60 Hz	Mode	5 GHz WLAN Tx
Frequency	5745, 5825 MHz	Channel	149, 165

Measurements

Channel	Mode	Temp °C	FL (MHz)	FL Limit (MHz)	FH (MHz)	FH Limit (MHz)	Frequency Range (MHz)
149,165	802.11a (20 MHz)	+21.5	5736.7	5725.0	5833.3	5875.0	96.6
149,165	802.11ax (20 MHz)		5735.4	5725.0	5834.6	5875.0	99.2
151, 159	802.11ax (40 MHz)		5736.0	5725.0	5814.0	5875.0	78.0
155	802.11ax (80 MHz)		5735.9	5725.0	5814.1	5875.0	78.2
149,165	802.11a (20 MHz)	-40	5736.7	5725.0	5833.3	5875.0	96.6
149,165	802.11ax (20 MHz)		5735.5	5725.0	5834.5	5875.0	99.0
151, 159	802.11ax (40 MHz)		5736.1	5725.0	5814.0	5875.0	77.9
155	802.11ax (80 MHz)		5735.9	5725.0	5814.1	5875.0	78.2
149,165	802.11a (20 MHz)	+85	5736.7	5725.0	5833.3	5875.0	96.6
149,165	802.11ax (20 MHz)		5735.5	5725.0	5834.5	5875.0	99.0
151, 159	802.11ax (40 MHz)		5736.0	5725.0	5814.1	5875.0	78.1
155	802.11ax (80 MHz)		5735.9	5725.0	5814.1	5875.0	78.2

Plots

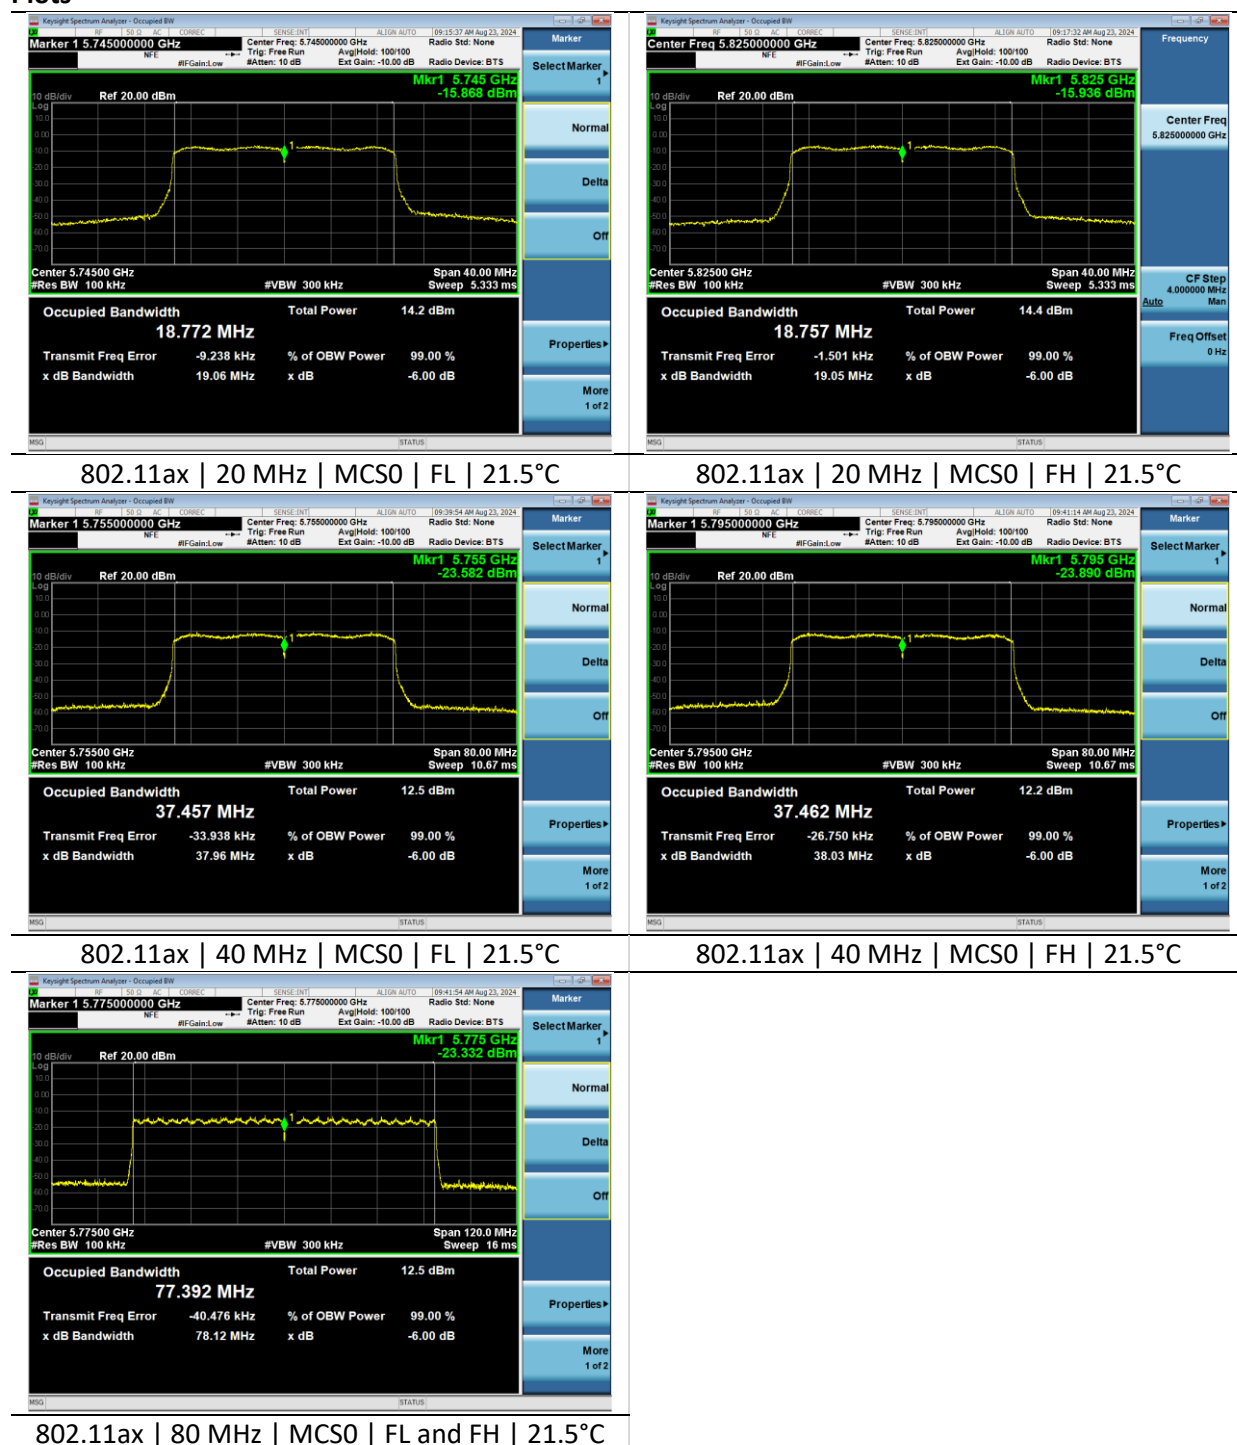

Company: Ezurio	Page 22 of 43	Name: Module, SONA NX611 M.2 2230, 1 MHF
Report: TR3768-166-5G-4268		Model: SONA NX611M
Job: C-3768		Serial: 00047

5.1.4 Unwanted emissions in the spurious domain

Operator	Anthony Smith	QA	Dylan Rosenfeldt
Temperature	20.2, 20.7°C	R.H. %	19.9, 28.9
Test Date	12/5/2024, 1/6/2025	Location	RF Conducted Bench
Requirement	ETSI 300 440 4.2.4 AS/NZS 4268 6.4, 7.2	Method	ETSI 300 440 4.2.4

Limits:

Frequency ranges	47 MHz to 74 MHz 87,5 MHz to 108 MHz 174 MHz to 230 MHz 470 MHz to 862 MHz	Other frequencies ≤ 1 000 MHz	Frequencies > 1 000 MHz
State			
Operating	4 nW	250 nW	1 µW
Standby	2 nW	2 nW	20 nW


Test Parameters

Frequency	25-40000 MHz	Setup	Antenna Port
Detector(s)	Peak		

EUT Parameters

Input Power	120 VAC @ 60 Hz	Mode	CW Tx
Frequency	5745, 5765, 5785, 5805, 5825 MHz	Channel	149, 153, 157, 161, 165
Notes	No emissions were found to fall within 10dB of the limit		

Plots

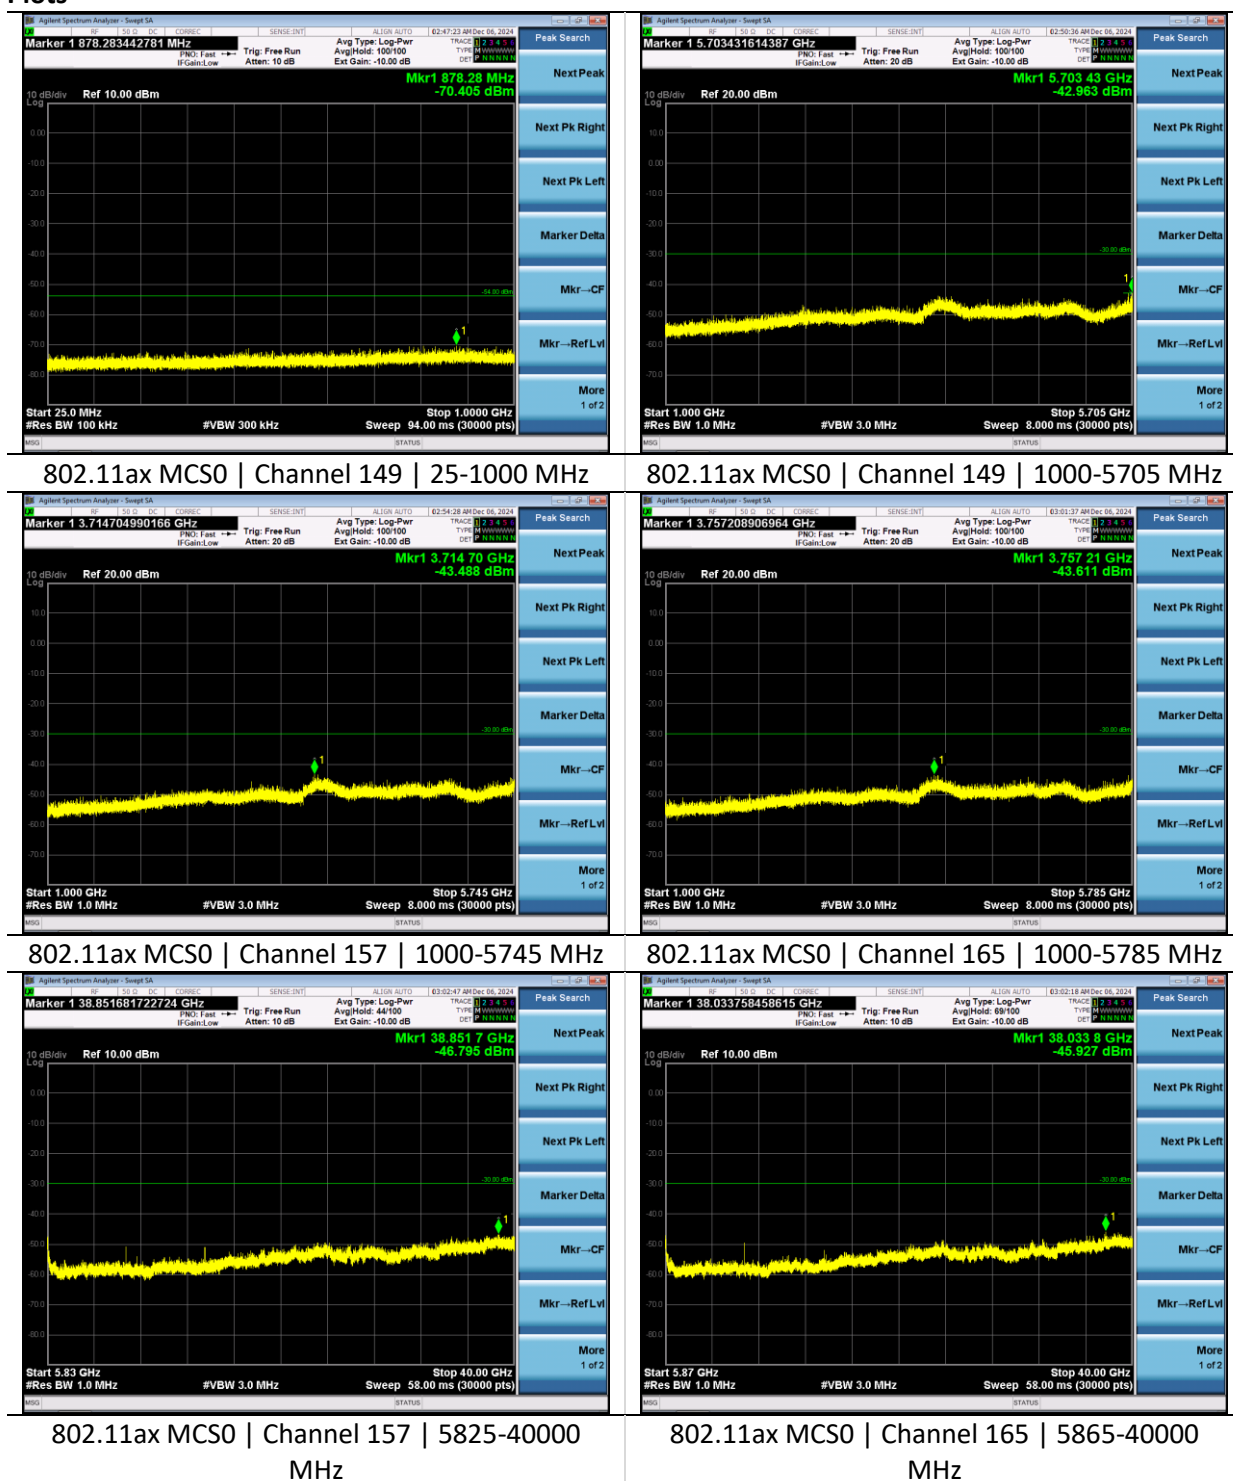

Company: Ezurio	Page 24 of 43	Name: Module, SONA NX611 M.2 2230, 1 MHF
Report: TR3768-166-5G-4268		Model: SONA NX611M
Job: C-3768		Serial: 00047

5.1.5 Adjacent channel selectivity

Operator	Anthony Smith	QA	Dylan Rosenfeldt
Temperature	19.8°C	R.H. %	29.3%
Test Date	12/20/2024	Location	RF Conducted Bench
Requirement	ETSI 300 440 4.3.3 AS/NZS 4268 7.2	Method	ETSI 301 440 4.3.3.4

Limit:

The adjacent channel selectivity of the equipment under specified conditions shall not be less than $-30 \text{ dBm} + k$.

The correction factor, k , is as follows:

$$k = -20\log f - 10\log BW$$

Where:

- f is the frequency in GHz;
- BW is the channel bandwidth in MHz.

The factor k is limited within the following:

- $-40 \text{ dB} < k < 0 \text{ dB}$.

Test Parameters

Adjacent channel Frequency	5745, 5785, 5825 MHz	Setup	Antenna port
Blocking Signal	CW	Note	Passing level of blocking signals are 1dB above level where under 10% PER is found (e.g. under 10% at -32 dBm, over 10% at -31 dBm)

Instrumentation


Asset #	Description	Manufacturer	Model #	Serial #	Date	Due Date	Status
AA 960182	RF Splitter/Combiner	Mini-Circuits	ZFSC-2-10G+	F707701704	1/28/2025	1/28/2026	Active Verification
CC 000314C	Vector Signal Generator	Agilent	E4438C	US 41469143	4/10/2024	4/10/2025	Active Calibration
EE 960087	Analyzer - Spectrum	Agilent	N9010A	MY53400296	4/10/2024	4/10/2025	Active Calibration

Company: Ezurio	Page 25 of 43	Name: Module, SONA NX611 M.2 2230, 1 MHF
Report: TR3768-166-5G-4268		Model: SONA NX611M
Job: C-3768		Serial: 00047

EUT Parameters

Input Power	120VAC 60 Hz	Mode	5GHz WLAN RX
Frequency	5765 and 5805 MHz	Channel	153, 161
AE	Litepoint IQxel-M		


Setup Photos

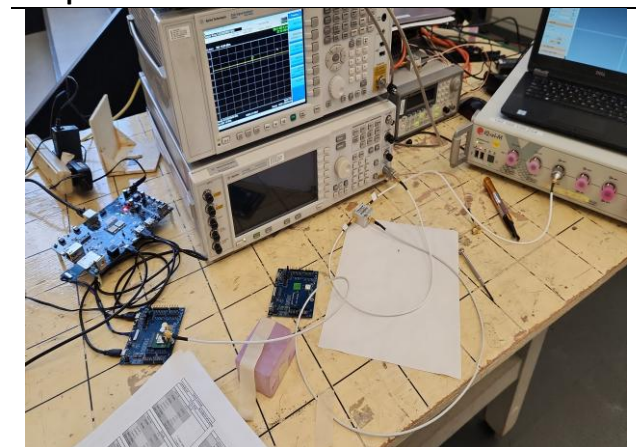

Measurements


Frequency (MHz)	Pmin (RSSI)	Pmin + 3dB (RSSI)	Blocking Signal Frequency (MHz)	Packet Error Rate (%)	Blocking Power (dBm)	Occupied Bandwidth (MHz)	k Factor (dB)	Limit (dBm)
5765	-82	-79	5745	42.0	-28	19.3	-28.1	-58.1
5765	-82	-79	5785	36.6	-28	19.3	-28.1	-58.1
5805	-82	-79	5785	18.1	-28	19.4	-28.2	-58.2
5805	-82	-79	5825	17.6	-28	19.4	-28.2	-58.2

Plots

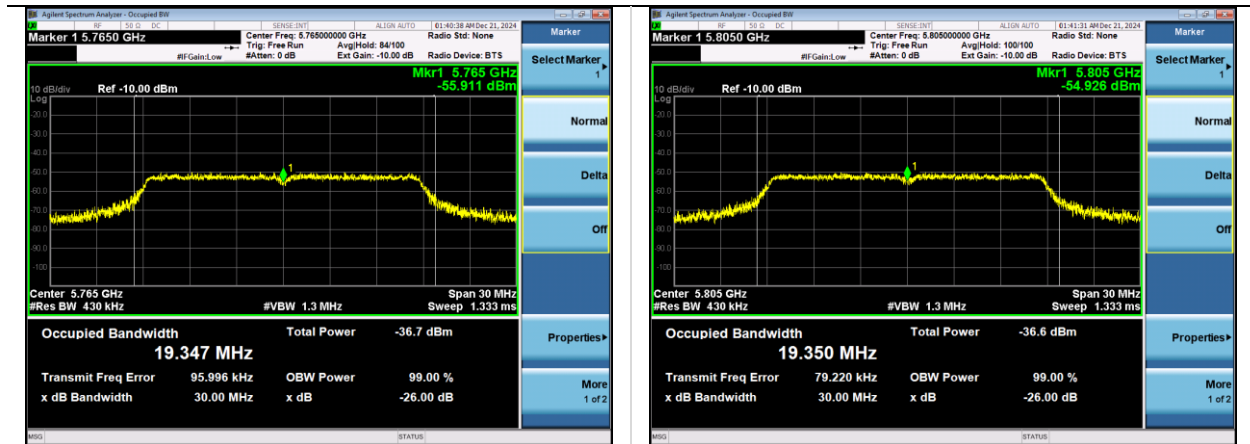

5765 MHz | 19.3 MHz OBW

5805 MHz | 19.4 MHz OBW

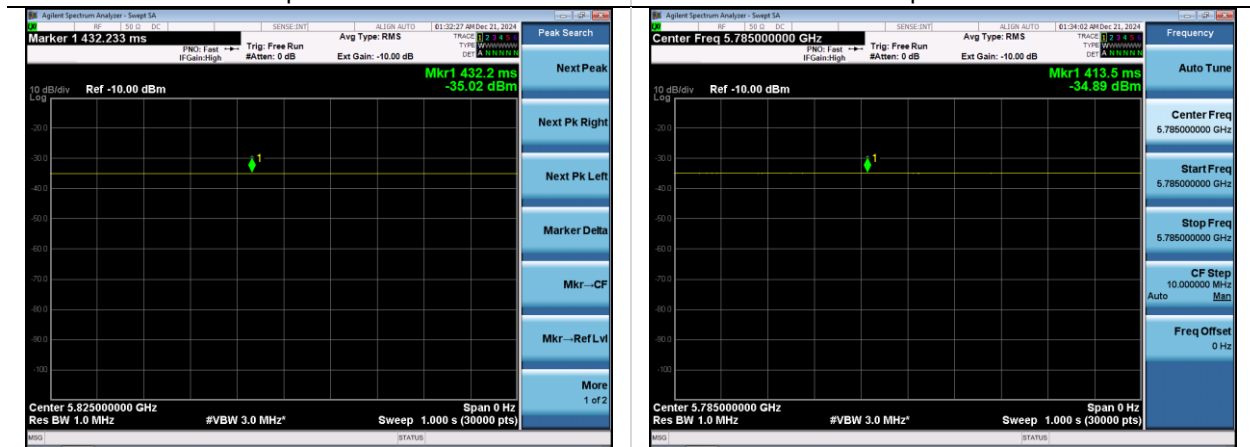

5825 MHz Blocking Signal -35.0 dBm

5785 MHz Blocking Signal -34.9 dBm



5745 MHz Blocking Signal -35.1 dBm

Company: Ezurio	Page 27 of 43	Name: Module, SONA NX611 M.2 2230, 1 MHF
Report: TR3768-166-5G-4268		Model: SONA NX611M
Job: C-3768		Serial: 00047

5.1.6 Blocking or desensitization

Operator	Anthony Smith	QA	Dylan Rosenfeldt
Temperature	22.5°C	R.H. %	60.9%
Test Date	6/4/2024	Location	RF Conducted Bench
Requirement	ETSI 300 440 4.3.4 AS/NZS 4268 7.2	Method	ETSI 300 440 4.3.4.3

Limits:

Table 6: Limits for blocking or desensitization

Receiver category	Limit
1	-30 dBm + k
2	-45 dBm + k
3	-60 dBm + k

The correction factor, k , is as follows:

$$k = -20 \log f - 10 \log BW$$

Where:

- f is the frequency in GHz;
- BW is the occupied bandwidth in MHz.

The factor k is limited within the following:

- $-40 \text{ dB} < k < 0 \text{ dB}$.

Test Parameters

Frequency	5785 MHz	Setup	Antenna Port
Blocking Frequencies	5960, 5610, 6125, 5445, 6620, 4950 MHz	Receiver	Category 1
RBW	1 MHz	VBW	3 MHz

Instrumentation

Asset #	Description	Manufacturer	Model #	Serial #	Date	Due Date	Status
AA 960180	Attenuator - Step Variable 1 dB	RF Lambda	RKT2G6A10	16100801	1/28/2025	1/28/2026	Active Verification
AA 960182	RF Splitter/Combiner	Mini-Circuits	ZFSC-2-10G+	F707701704	1/28/2025	1/28/2026	Active Verification
EE 960088	Analyzer - EMI Receiver	Agilent	N9038A	MY51210138	12/10/2024	12/10/2025	Active Calibration
EE 960184	RF Splitter/Combiner	mini-circuits	ZFSC-2-10G +	S F707601702	1/28/2025	1/28/2026	Active Verification
EE 960210	Vector Signal Generator	Rohde & Schwarz	SMM100A	101827	12/24/2024	12/24/2025	Active Calibration

Company: Ezurio	Page 28 of 43	Name: Module, SONA NX611 M.2 2230, 1 MHF
Report: TR3768-166-5G-4268		Model: SONA NX611M
Job: C-3768		Serial: 00047

EUT Parameters

Input Power	120 VAC @ 60 Hz	Mode	5GHz WLAN Rx
Frequency	5745, 5825 MHz	Channel	149, 165

Measurements

Operating Frequency (MHz)	Channel Tested	Wanted Signal Power (dBm)	Blocking Signal Frequency (MHz)	Blocking Signal Power (dBm)	k Factor (dB)	Minimum Limit (dBm)	Margin (dB)
5745	149	-94.3	5571	-18.0	-27.4	-57.4	-39.4
5745	149	-94.3	5407	-17.9	-27.4	-57.4	-39.5
5745	149	-94.3	4915	-15.0	-27.4	-57.4	-42.4
5825	165	-94.0	5999	-18.6	-27.4	-57.4	-38.8
5825	165	-94.0	6163	-16.8	-27.4	-57.4	-40.6
5825	165	-94.0	6655	-8.9	-27.4	-57.4	-48.5

Plots



Blocking Signal 4915 MHz

Blocking Signal 6655 MHz

Blocking Signal 5407 MHz

Blocking Signal 6163 MHz

Blocking Signal 5571 MHz

Blocking Signal 5999 MHz

Company: Ezurio	Page 30 of 43	Name: Module, SONA NX611 M.2 2230, 1 MHF
Report: TR3768-166-5G-4268		Model: SONA NX611M
Job: C-3768		Serial: 00047

5.1.7 Receiver spurious emissions

Operator	Anthony Smith	QA	Dylan Rosenfeldt
Temperature	21.6-23.0°C	R.H. %	31.1-48.6%
Test Date	6/20/2024, 6/21/2024, 6/24/2024, 7/1/2024, 7/2/2024, 8/14/2024, 8/23/2024, 12/4/2024	Location	RF Conducted Bench
Requirement	ETSI 300 440 4.2.4 AS/NZS 4268 7.2	Method	ETSI 300 440 4.2.4.3

Limits:

Frequency (MHz)	Maximum Power	Bandwidth
30-1000	2 nW	100 kHz
1000-40000	20 nW	1 MHz

Test Parameters

Frequency	30-40000 MHz	Setup	Antenna Port
RBW	100 kHz 1 MHz	VBW	300 kHz 3 MHz
Detector(s)	Peak – Trace Average (RMS) – Final		

Instrumentation


Asset #	Description	Manufacturer	Model #	Serial #	Date	Due Date	Status
AA 960144	Cable	Gore	EKD01D010720	5800373	1/28/2025	1/28/2026	Active Verification
AA 960172	Cable	A.H. Systems, Inc.	SAC-26G-1	387	1/28/2025	1/28/2026	Active Verification
EE 960087	Analyzer - Spectrum	Agilent	N9010A	MY53400296	4/10/2024	4/10/2025	Active Calibration
EE 960088	Analyzer - EMI Receiver	Agilent	N9038A	MY51210138	12/10/2024	12/10/2025	Active Calibration
EE 960090	Meter - RF Power	Anritsu	ML2495A	1335006	4/11/2024	4/11/2025	Active Calibration
EE 960091	Sensor - RF Power	Anritsu	MA2491A	1249277	4/11/2024	4/11/2025	Active Calibration

EUT Parameters

Input Power	120 VAC @ 60 Hz	Mode	5GHz WLAN Rx
Frequency	5745-5825 MHz	Channel	See 2.7
Note	No emissions within 6dB of limit		

Company: Ezurio	Page 31 of 43	Name: Module, SONA NX611 M.2 2230, 1 MHF
Report: TR3768-166-5G-4268		Model: SONA NX611M
Job: C-3768		Serial: 00047

Plots

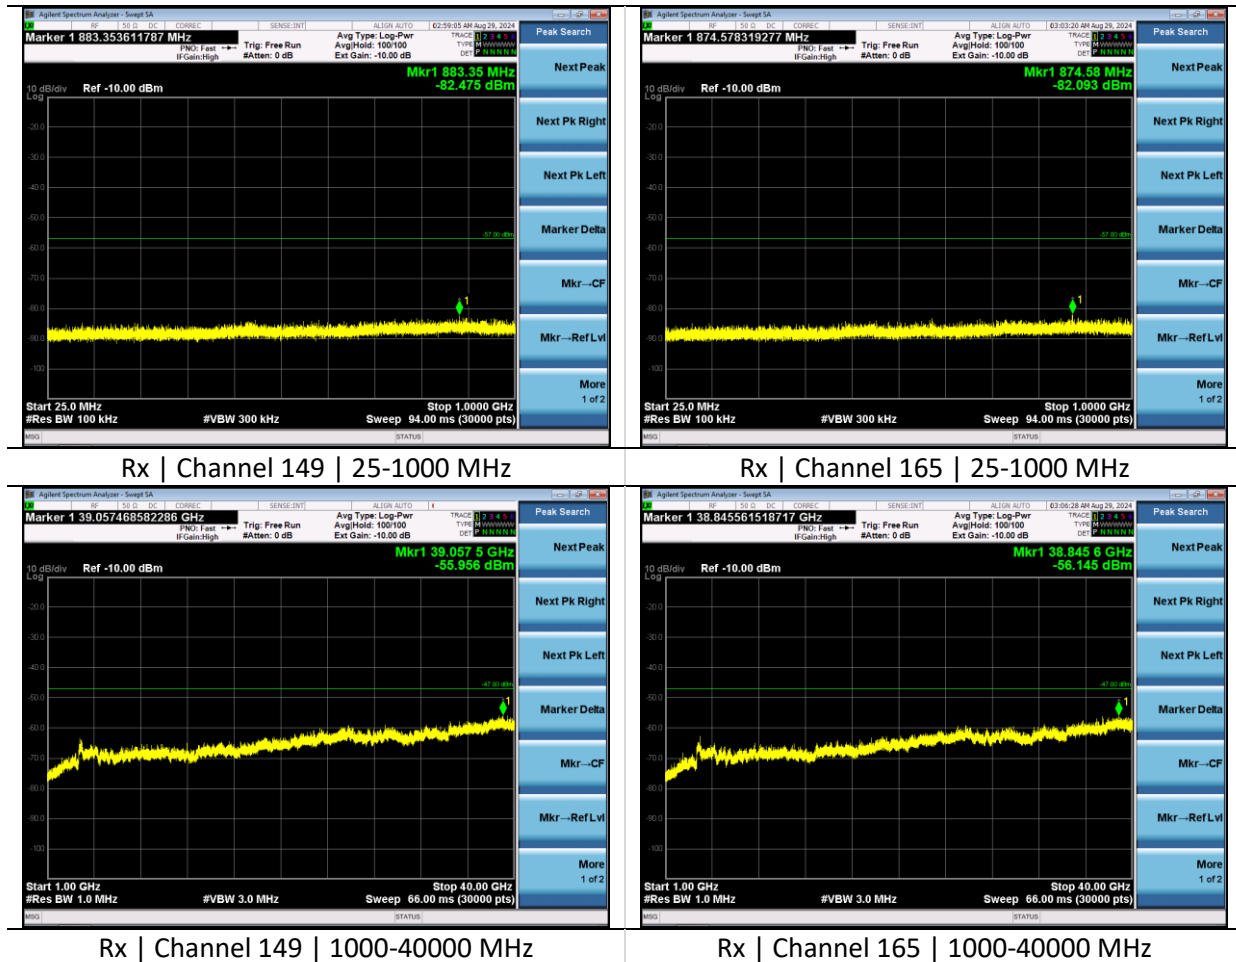

Company: Ezurio	Page 32 of 43	Name: Module, SONA NX611 M.2 2230, 1 MHF
Report: TR3768-166-5G-4268		Model: SONA NX611M
Job: C-3768		Serial: 00047

5.1.8 Spectrum Access Techniques – Listen Before Talk

Operator	Anthony Smith	QA	Dylan Rosenfeldt
Temperature	21.7°C	R.H. %	23.60%
Test Date	12/20/2024	Location	RF Conducted Bench
Requirement	ETSI 300 440 4.4.2 AS/NZS 4268 7.2	Method	ETSI 301 440 4.4.2.2.2

Test Parameters

Frequency	5785 MHz	Setup	Antenna Port
Chosen Threshold Level	-75 dBm/MHz	Interference Signal Level	-75.3 dBm/MHz
Interference Signal Frequency	5785 MHz	Threshold Level Calculation	-80 dBm + c C = 10logBW

Instrumentation

Asset #	Description	Manufacturer	Model #	Serial #	Date	Due Date	Status
AA 960180	Attenuator - Step Variable 1 dB	RF Lambda	RKT2G6A10	16100801	1/28/2025	1/28/2026	Active Verification
AA 960182	RF Splitter/Combiner	Mini-Circuits	ZFSC-2-10G+	F707701704	1/28/2025	1/28/2026	Active Verification
AA 960184	Attenuator - Step Variable 10 dB	RF Lambda	RKT2G6A60	17031005	1/28/2025	1/28/2026	Active Verification
CC 000259C	Generator - Function / Arbitrary Waveform	Agilent	33250A	US40000583	4/10/2024	4/10/2026	Active Calibration
CC 000314C	Vector Signal Generator	Agilent	E4438C	US 41469143	4/10/2024	4/10/2025	Active Calibration
CC 000710C	Oscilloscope	Agilent	MSO8104A	MY45001068	4/9/2024	4/9/2025	Active Calibration
EE 960086	Generator - Signal	Rohde & Schwarz	SMB100A	175512	12/27/2024	12/27/2025	Active Calibration
EE 960087	Analyzer - Spectrum	Agilent	N9010A	MY53400296	4/10/2024	4/10/2025	Active Calibration
EE 960166	Coupler - Directional	Narda	3202B-10	11605	1/28/2025	1/28/2026	Active Verification
EE 960184	RF Splitter/Combiner	mini-circuits	ZFSC-2-10G +	S F707601702	1/28/2025	1/28/2026	Active Verification


EUT Parameters

Input Power	120 VAC @ 60 Hz	Mode	5GHz WLAN
Frequency	5785 MHz	Channel	157


Company: Ezurio	Page 33 of 43	Name: Module, SONA NX611 M.2 2230, 1 MHF
Report: TR3768-166-5G-4268		Model: SONA NX611M
Job: C-3768		Serial: 00047

Interference Signal		
Frequency (MHz)	Threshold Level (dBm)	Sig Gen Setting (dBm)
5785	-75.2	-56.0


Plots

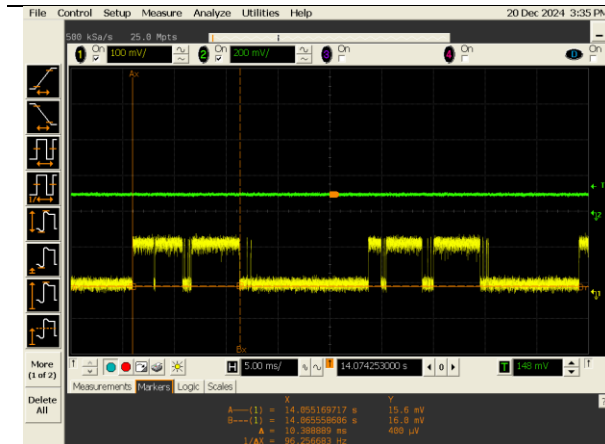


Transmitter on-time: 10.4ms

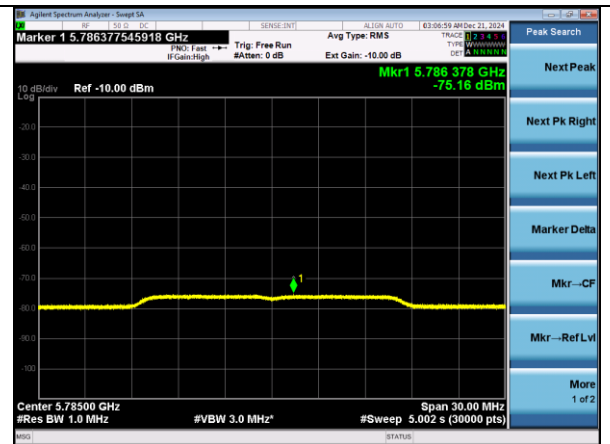

5785 MHz Interference Signal Level

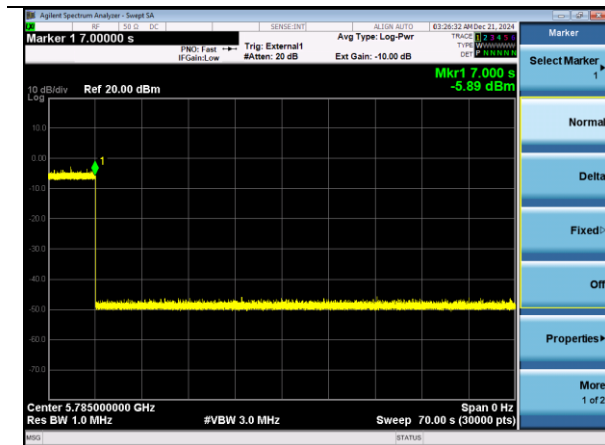

Interference signal starts at 7s

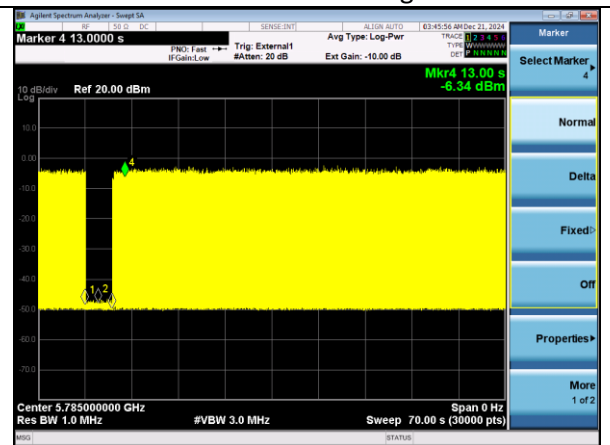

Transmission starts again at signal generator level -58.0 dBm

Company: Ezurio	Page 35 of 43	Name: Module, SONA NX611 M.2 2230, 1 MHF
Report: TR3768-166-5G-4268		Model: SONA NX611M
Job: C-3768		Serial: 00047

5.2 Radiated Emissions

Description of Measurement	<p>The frequency spectrum is investigated for intentional and / or unintentional signals emanating from the EUT by use of a standardized test site and measurement antenna.</p> <p>The antenna, cable, pre-amp, and other necessary measurement system correction factors are loaded onto the EMI receiver / spectrum analyzer when the measurements are performed allowing the data to be gathered and reported as corrected values.</p> <p>The maximum emissions from the EUT are determined by turn-table azimuth rotation (360°) and scanning of the measurement antenna. Maximized levels are noted at degree values of azimuth, measurement antenna height, and measurement antenna polarity.</p>
Example Calculations	<p>Measurement (dBμV) + Cable factor (dB) + Other (dB) + Antenna Factor (dB/m) = Corrected Reading (dBμV/m)</p> <p>Margin (dB) = Limit (dBμV/m) - Corrected Reading (dBμV/m)</p> <p>Example at 4000 MHz: Reading = 40 dBμV + 3.4 dB + 0.9 dB + 6.5 dB/m = 50.8 dBμV/m Average Limit = 20 log (500) = 54 dBμV/m Margin = 54 dBμV/m - 50.8 dBμV/m = 3.2 dB</p>

Block Diagram



5.2.1 Unwanted emissions in the spurious domain

Operator	Dylan Rosenfeldt, Nicole Sedmak, Jon Dilley, Zachary Brown	QA	Jon Dilley, Zachary Brown, Adam Alger, Nicole Sedmak
Temperature	22.7-26.3°C	R.H. %	37.2-51.7%
Test Date	4/30/2024, 5/7/2024, 5/8/2024, 5/15/2024, 5/22/2024, 5/23/2024, 5/28/2024	Location	Chamber 3, Chamber 5
Requirement	ETSI 300 440 4.2.4 AS/NZS 4268 6.4, 7.2	Method	ETSI 300 440 4.2.4.3.2

Limits:

Frequency ranges	47 MHz to 74 MHz 87,5 MHz to 108 MHz 174 MHz to 230 MHz 470 MHz to 862 MHz	Other frequencies ≤ 1 000 MHz	Frequencies > 1 000 MHz
State			
Operating	4 nW	250 nW	1 µW
Standby	2 nW	2 nW	20 nW

Test Parameters

Frequency	25-40000 MHz	Distance	3 m
Detector(s)	Peak Trace Peak and Average Final	Table height	150 cm
RBW	<1000 MHz – 100 kHz >1000 MHz – 1 MHz	VBW	<1000 – 300 kHz >1000 MHz – 3MHz

Instrumentation


Asset #	Description	Manufacturer	Model #	Serial #	Date	Due Date	Status
AA 960007	Antenna - Double Ridge Horn	EMCO	3115	9311-4138	11/19/2024	11/19/2025	Active Calibration
AA 960150	Antenna - Biconical	ETS Lindgren	3110B	0003-3346	12/9/2024	12/9/2025	Active Calibration
AA 960161	Filter - Highpass 5 GHz	K&L Microwave	11SH10-8000	2	4/10/2024	4/10/2025	Active Calibration
AA 960162	Cable	MegaPhase	EM2-S1S1-120	51503501 001	1/28/2025	1/28/2026	Active Verification
AA 960163	Antenna - Log Periodic	A.H. Systems, Inc.	SAS-512-2	500	12/11/2024	12/11/2025	Active Calibration
AA 960174	Antenna - Small Horn	ETS Lindgren	3116C-PA	00206880	12/2/2024	12/2/2025	Active Calibration
AA 960209	Antenna - Low Noise Amplifier	Mini-Circuits	ZVA-213X-S+	037101808	11/19/2024	11/19/2025	Active Calibration
AA 960217	Antenna - Biconical	A.H. Systems, Inc.	SAS-540	852	1/15/2025	1/15/2026	Active Calibration
AA 960220	Cable	A.H. Systems, Inc.	SAC-26G-6	552	1/28/2025	1/28/2026	Active Verification
EE 960087	Analyzer - Spectrum	Agilent	N9010A	MY53400296	4/10/2024	4/10/2025	Active Calibration
EE 960203	Analyzer - EMI Receiver	Keysight	N9038A	MY56400072	4/10/2024	4/10/2025	Active Calibration
LSC-300	Cable	Chamber 3 Emissions	-	-	1/24/2025	1/24/2026	Active Verification
LSC-500	Cable	Chamber 5 Emissions	-	-	1/27/2025	1/27/2026	Active Verification

Company: Ezurio	Page 37 of 43	Name: Module, SONA NX611 M.2 2230, 1 MHF
Report: TR3768-166-5G-4268		Model: SONA NX611M
Job: C-3768		Serial: 00047


EUT Parameters

Input Power	120 VAC @ 60 Hz	Mode	5GHz WLAN Tx
EUT	X, Y, Z Plane Orientations	AE	HP Elitebook 840G1 Ezurio – SOM60 Development Kit
Notes	Worst Case plots shown. No radio emissions within 6dB of limit.		


Setup Photos

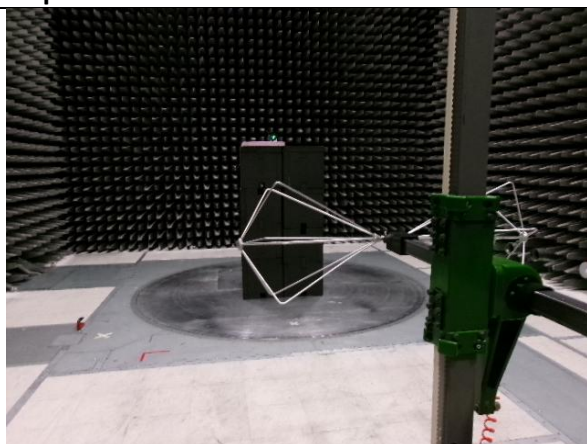


25-200 MHz

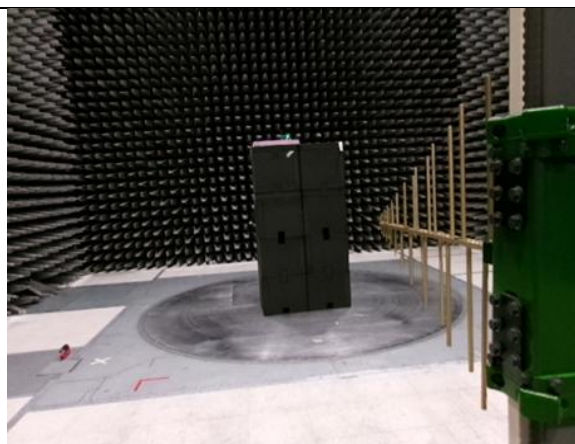

200-1000 MHz

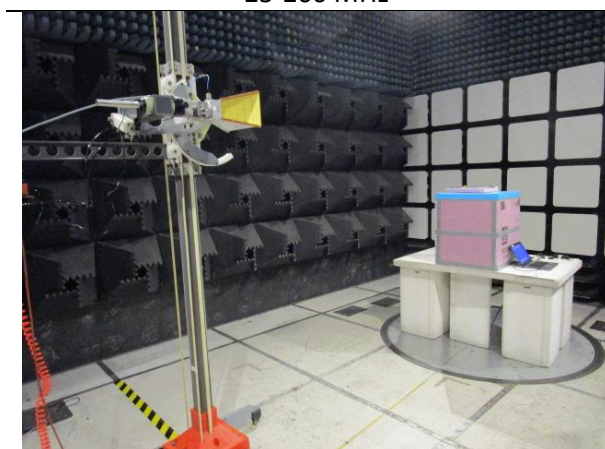


1000-4000 MHz

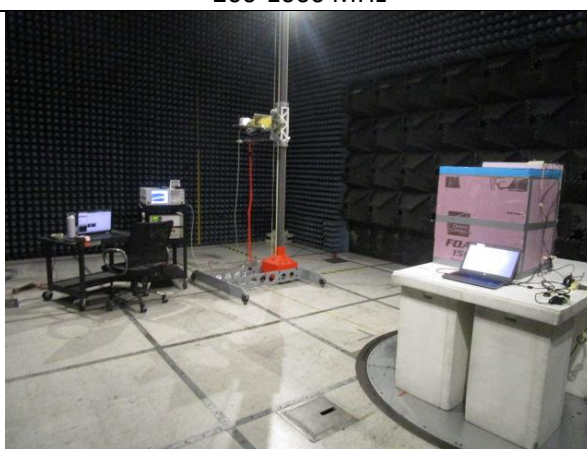

4000-18000 MHz




18000-26000 MHz

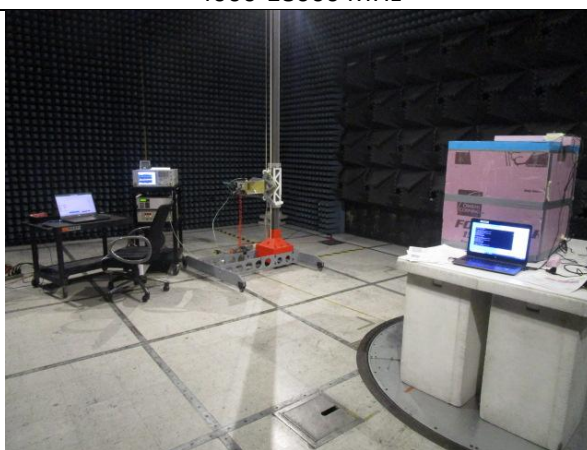

26000-40000 MHz

Company: Ezurio	Page 39 of 43	Name: Module, SONA NX611 M.2 2230, 1 MHF
Report: TR3768-166-5G-4268		Model: SONA NX611M
Job: C-3768		Serial: 00047

Tx Plots

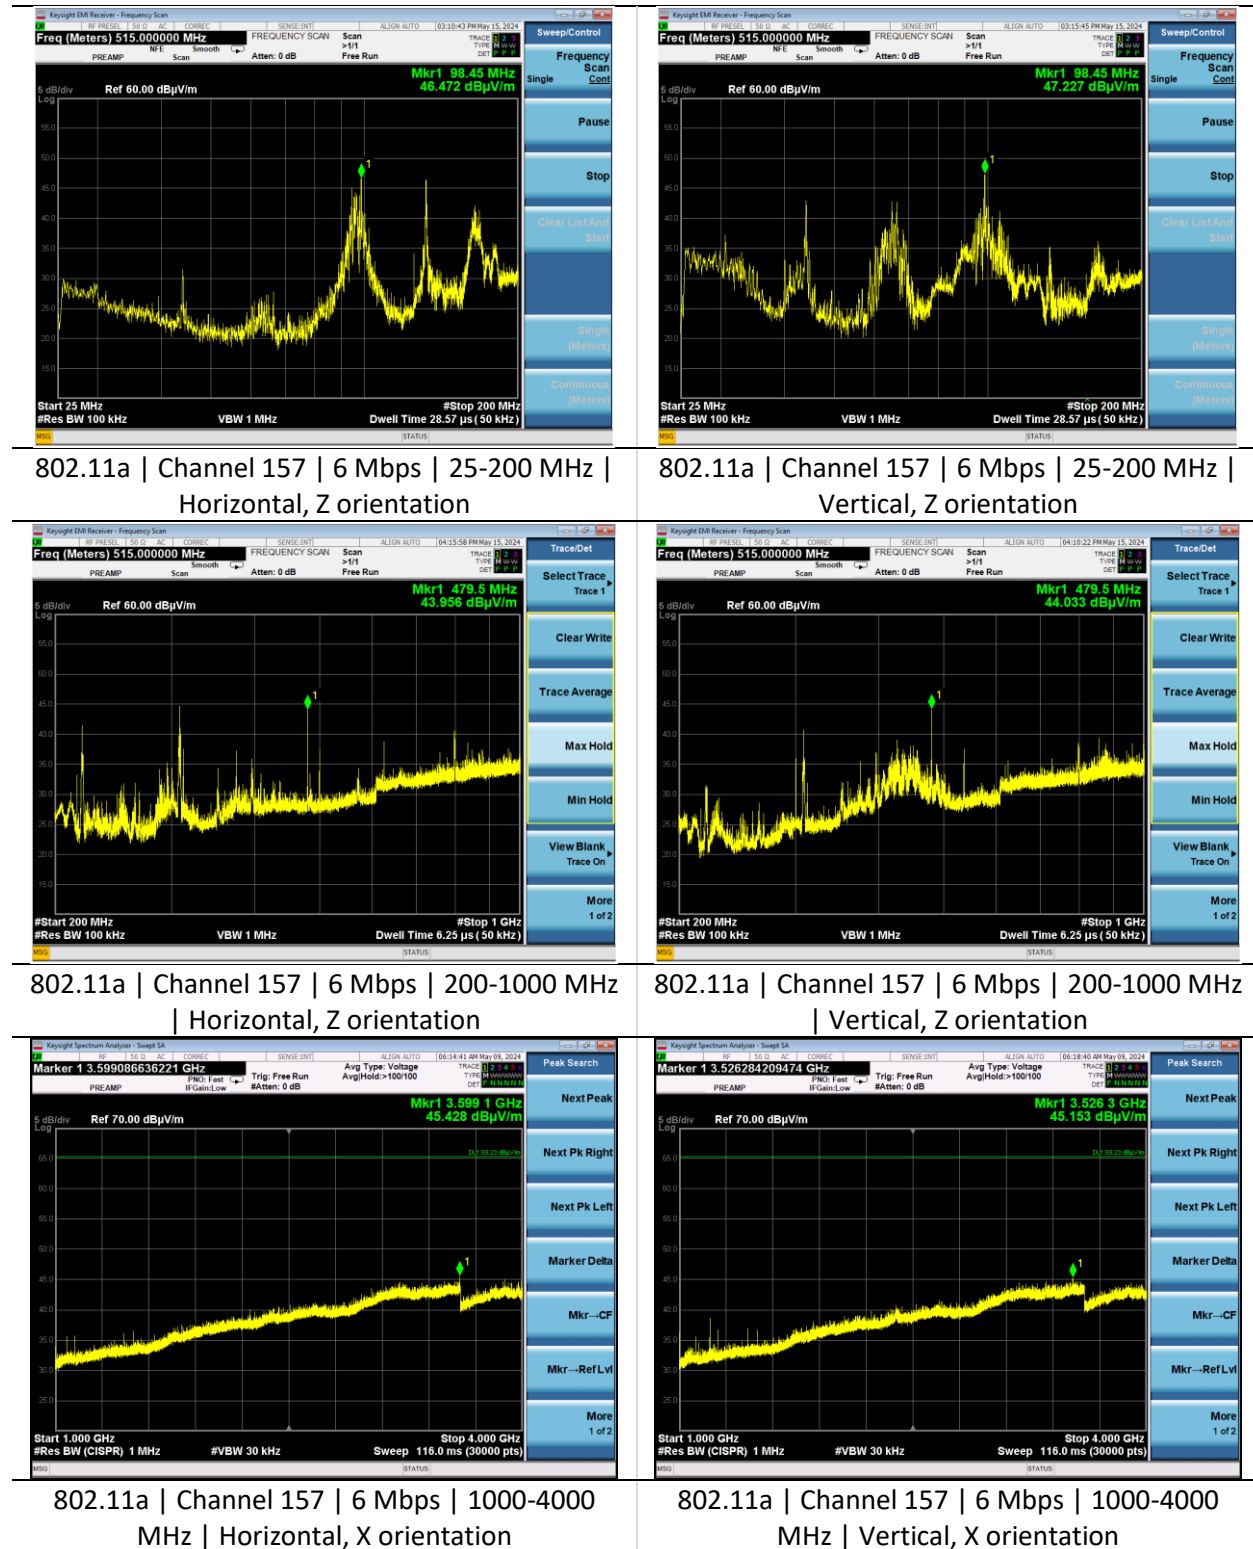

Company: Ezurio


Report: TR3768-166-5G-4268

Job: C-3768


Name: Module, SONA NX611 M.2 2230, 1 MHF

Model: SONA NX611M

Serial: 00047

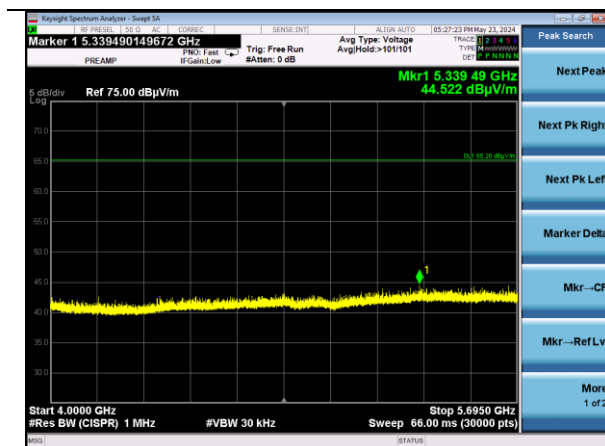


802.11ax | Channel 149 | MCS0 | 4000-5695 MHz
 | Horizontal, Z orientation

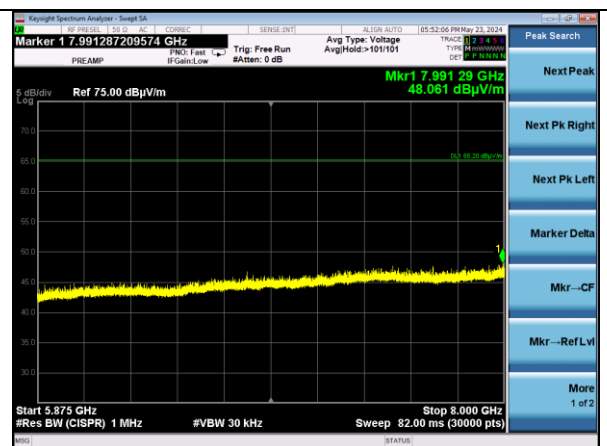


802.11ax | Channel 165 | MCS0 | 5875-8000
 MHz | Horizontal, Z orientation



802.11a | Channel 157 | 6 Mbps | 8000-18000
 MHz | Vertical, Y orientation

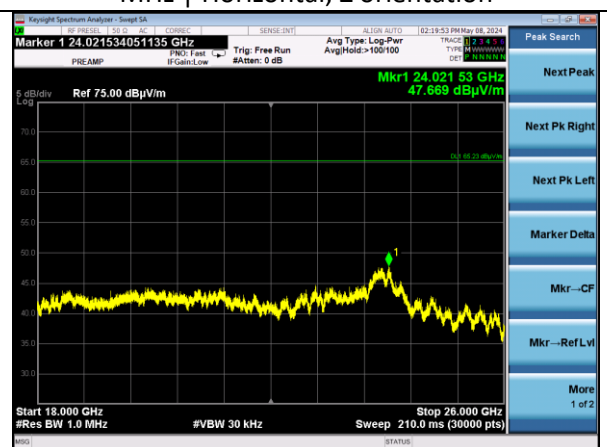


802.11a | Channel 157 | 6 Mbps | 18000-26000
 MHz | Vertical, X orientation

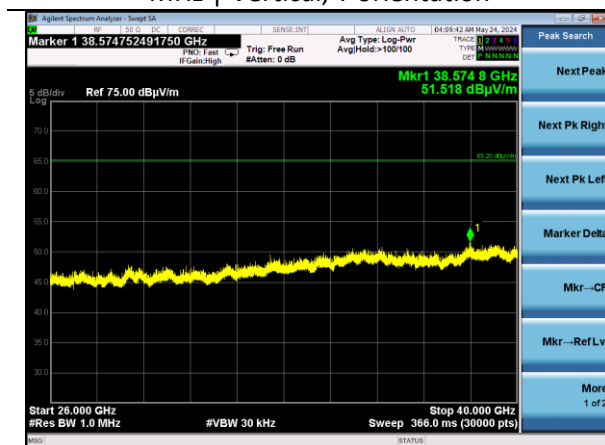

802.11a | Channel 157 | 6 Mbps | 26000-40000
 MHz | Vertical, X orientation


Company: Ezurio	Page 41 of 43	Name: Module, SONA NX611 M.2 2230, 1 MHF
Report: TR3768-166-5G-4268		Model: SONA NX611M
Job: C-3768		Serial: 00047

Rx/Standby Plots

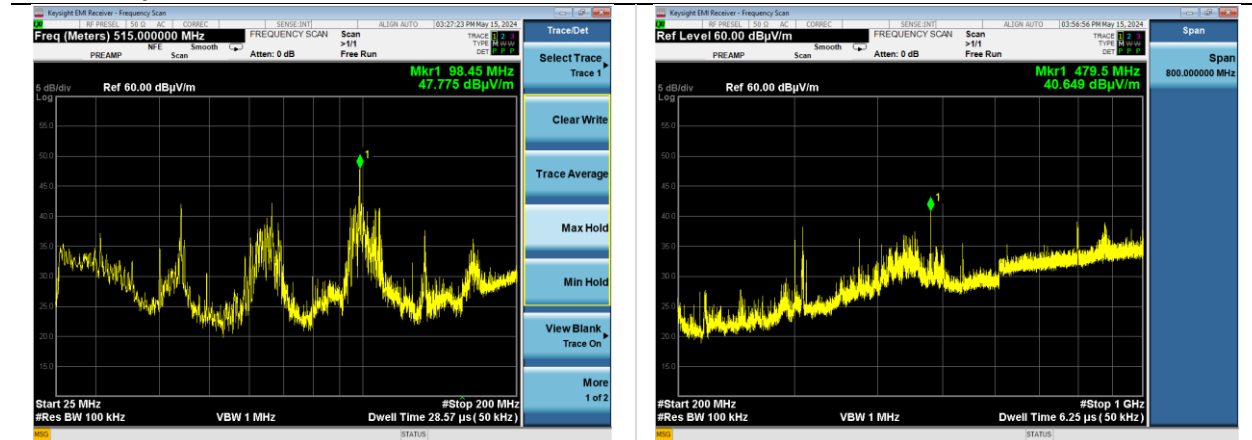


Rx | Channel 157 | 25-200 MHz | Vertical, Y Orientation

Rx | Channel 157 | 200-1000 MHz | Vertical, X Orientation

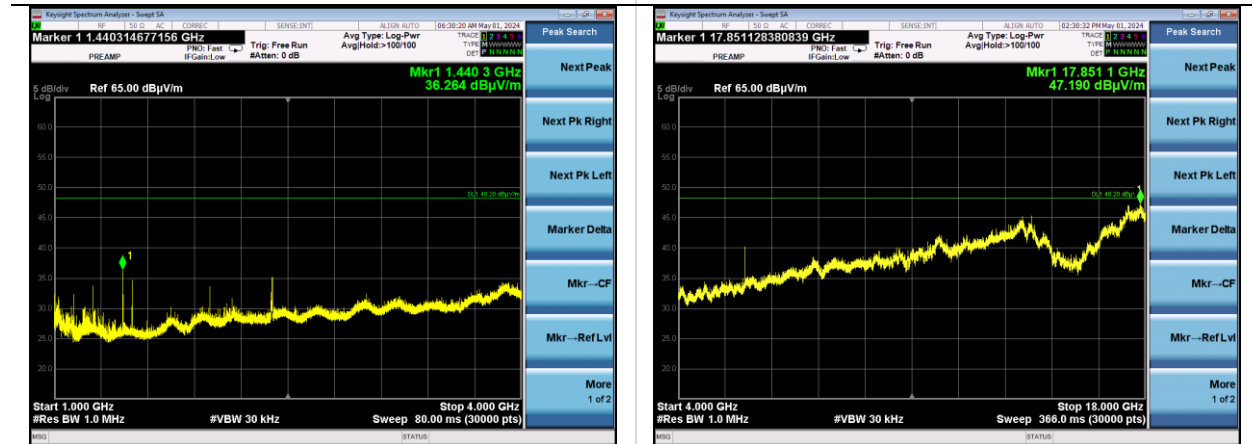

Rx | Channel 157 | 1000-4000 MHz | Horizontal, X orientation

Rx | Channel 157 | 4000-18000 MHz | Vertical, X orientation

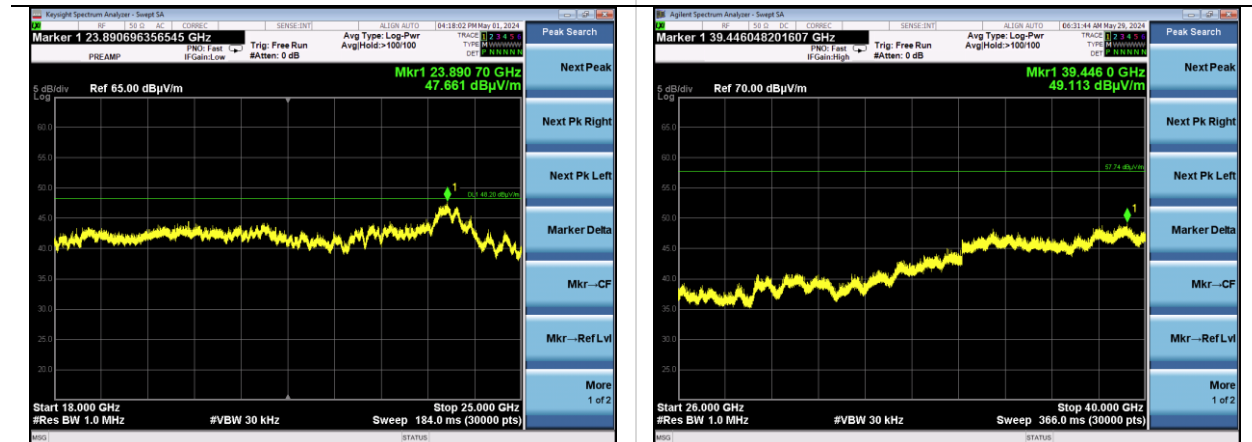

Rx | Channel 157 | 18000-25000 MHz | Horizontal, X orientation

Rx | Channel 157 | 26000-40000 MHz | Vertical, X orientation

Company: Ezurio	Page 42 of 43	Name: Module, SONA NX611 M.2 2230, 1 MHF
Report: TR3768-166-5G-4268		Model: SONA NX611M
Job: C-3768		Serial: 00047

6 REVISION HISTORY

Version	Date	Notes	Person
0	2/12/2025	Initial Draft	Anthony Smith

END OF REPORT